

INDOOR UNIT

1. CASSETTE TYPE :

AU * A12LALN

AU * A14LALN

1. FEATURE

■ **MODEL :**
AU*A12LALN
AU*A14LALN



■ FEATURES

● Energy saving

- All DC design
- Heat exchange efficiency increased and larger air flow by adoption of new type turbo fan


● Advancement in comfort

- Quiet operation was realized by adoption of new type turbo fan
- Improvement of air stream

● Improvement of installation & maintenance

- COMPACT DESIGN

Fits the European size ceiling.

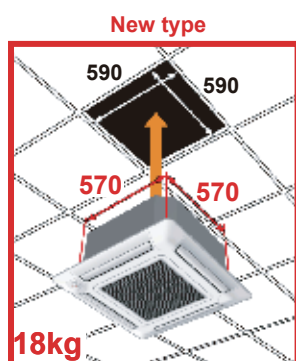


● Easy maintenance

① Maintenance of fan motor and fan

Maintenance of fan motor and fan can be done easily after taking off the panel, since bell-mouth can be removed easily

- A : Fan motor
- B : 2 stage turbo fan
- C : Bell-mouth
- D : Panel

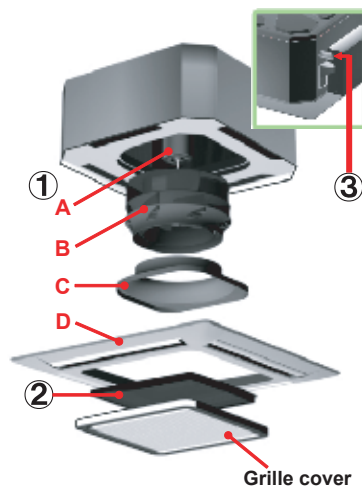

② Long life filter


: standard equipment

③ Adaptation of transparent drainage parts

Easy check of operation of drain-up kit when you install

● Easy installation

New type

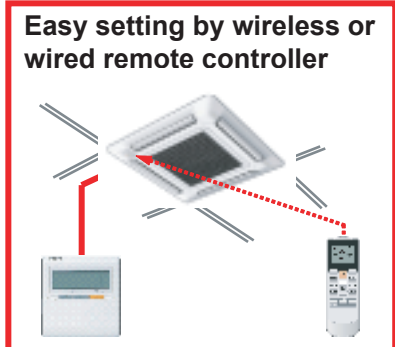

FUNCTION SETTING

● Outlet direction selection

- Performs operation matched to the number of outlets when 4 directions are unnecessary and outlets are blocked when the ceiling cassette is installed in a corner, etc.

4-way direction 3-way direction




4-way direction mode: Set when there are 4 outlets (shipped state).

3-way direction mode: Set when there are 3 outlets.

● Ceiling switching function

Air reaches sufficiently up to 3m height, even it is compact cassette type.

Also delivers air to high ceilings by selecting the mode and raising the air flow according to the height of the ceiling.

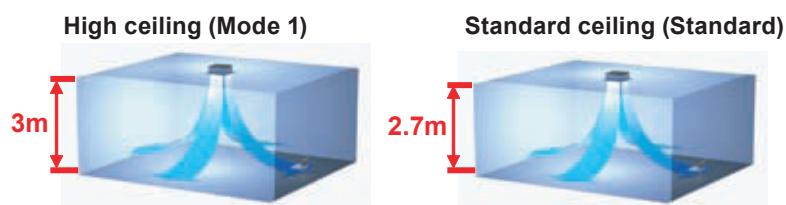

Standard...Operates at normal air flow.

Mode 1 ...Air flow becomes greater than normal.

● Filter sign

The indoor unit has sign to inform the user that it is time to clean the filter

● Cooling room temperature correction

● Heating room temperature correction

● Auto restart

The units restart automatically when the current was returned even when there was a power interruption during operation.

● Room temperature sensor switching

Switches from room temperature judgment by room temperature sensor attached to indoor unit body to room temperature judgment by room temperature sensor attached to wired remote controller.

● Economy operation

The power consumption can be reduced.

Powerful mode ...Standard

Soft mode ...Performs operation which reduces the power consumption

2. COMBINATION

2-1. OUTDOOR UNIT

■ MODEL :

AO*A12LA CL


AO*A14LA CL



2-2. REMOTE CONTROLLER

2-2-1. WIRED REMOTE CONTROLLER

■ MODEL : UTB-*UD




2-2-2. WIRELESS REMOTE CONTROLLER

■ MODEL : UTB-*NA



2-3. DECORATION PANEL

■ MODEL : UTG-UF*A-W



CAUTION

Remote controller and decoration panel are not supplied with the indoor unit.
Separate purchase is necessary.

3. SPECIFICATIONS

Type				CASSETTE MODEL			
				INVERTER HEATPUMP			
Model name				AU * A12LALN	AU * A14LALN		
Power source				230V ~ 50Hz			
Available voltage range				198-264V ~ 50Hz			
European energy label			Cooling	A	A		
			Heating	A	A		
Capacity	Cooling	Rated	kW	3.5	4.3		
			BTU/h	11950	14650		
		Min.-Max.	kW	0.9 - 4.4	0.9 - 5.4		
			BTU/h	3100 - 15000	3100 - 18400		
	Heating	Rated	kW	4.1	5.0		
			BTU/h	14000	17050		
Min.-Max.		kW	0.9 - 5.7	0.9 - 6.5			
		BTU/h	3100 - 19400	3100 - 22100			
Input power	Cooling	Rated	kW	1.05	1.33		
		*Max.		1.73	2.07		
		Heating		Rated	1.11	1.34	
	Heating	*Max.		2.30	2.88		
		Cooling		Rated	A	4.6	5.8
				*Max.		7.5	9.0
Heating	Rated	4.9	5.9				
	*Max.	10.0	12.5				
EER			Cooling	3.33		3.21	
COP			Heating	3.69		3.71	
Moisture removal			l/h (pints/h)	1.2 (2.1)	1.5 (2.6)		
Fan	Airflow rate	Cooling	High	m ³ /h	600	680	
			Med		530	580	
			Low		470	490	
			Quiet		410	410	
		Heating	High		600	800	
			Med		530	680	
			Low		470	580	
			Quiet		410	450	
	Type × Q'ty			Turbo × 1			
	Motor output			W	42		
Sound pressure level			Cooling	High	37	38	
				Med	34	34	
				Low	30	30	
				Quiet	27	27	
			Heating	High	37	43	
				Med	34	38	
				Low	31	34	
				Quiet	29	30	
Heat exchanger type			Dimensions (H × W × D)	mm	210 × 1310 × 13.3	210 × 1310 × 13.3	
					210 × 1250 × 13.3	210 × 1250 × 13.3	
			Fin pitch	1.20	1.20		
			Rows x Stages	2 x 10	2 x 10		
			Pipe type	Copper tube			
Enclosure			Material	PS			
			Colour	WHITE			
Dimensions (H × W × D)	Net	Unit	mm	245 × 570 × 570			
		Panel		49 × 700 × 700			
	Gross	Unit		265 × 730 × 625			
		Panel		120 × 765 × 755			
Weight	Net	Unit	kg(lb.)	15 (33)	15 (33)		
		Panel		2.6 (5.7)			
	Gross	Unit		18 (40)	18 (40)		
		Panel		4.5 (10.0)			
Connection pipe	Size	Liquid	mm	φ 6.35 (φ 1/4 in.)			
		Gas		φ 9.52(φ 3/8 in.)	φ 12.70(φ 1/2 in.)		
	Method	Flare					
Operation range		Cooling	°C	18 to 32			
			%RH	80 or less			
		Heating	°C	30 or less			
Remote controller type				WIRED or WIRELESS			
Drain pipe	Material			ABS			
	Size	mm	Outer diameter : 25.4 / Inner diameter : 19.4				

Note :

Specifications are based on the following conditions.

Cooling : Indoor temperature of 27 °CDB / 19 °CWB and outdoor temperature of 35 °CDB/24 °CWB.

Heating : Indoor temperature of 20 °CDB / 15 °CWB and outdoor temperature of 7 °CDB/6 °CWB.

Pipe length : 7.5 m, Height difference : 0 m.(Outdoor unit - Indoor unit)


Ceiling mode : Standard

*The maximum current and the maximum input value are the maximum values when operated within the operation (temperature) range.

4. DIMENSIONS



■ MODEL : AU*A12L, AU*A14L

(Unit : mm)

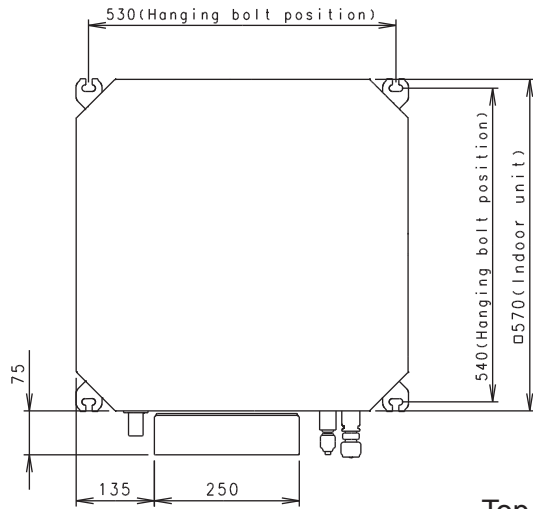


Top view


• Decoration panel mounting state

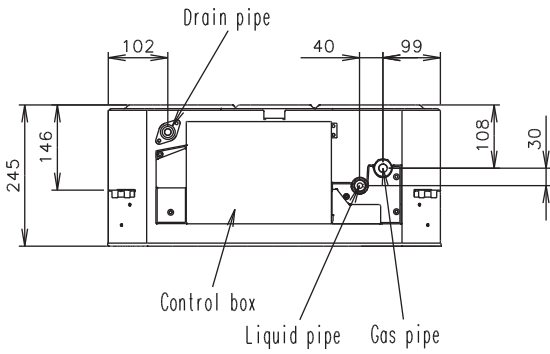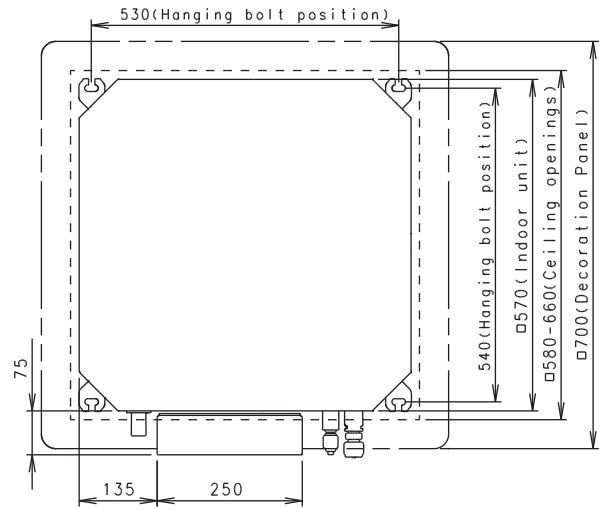


Side view

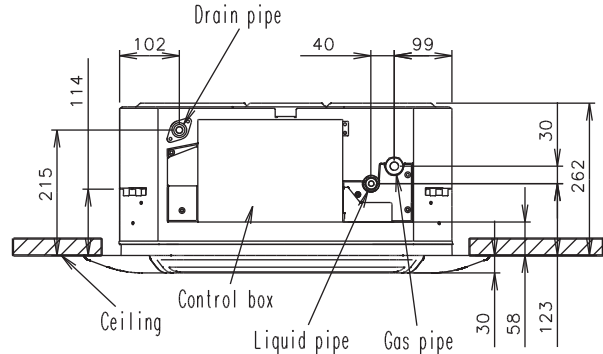

■ MODEL : UTG-UF*A-W

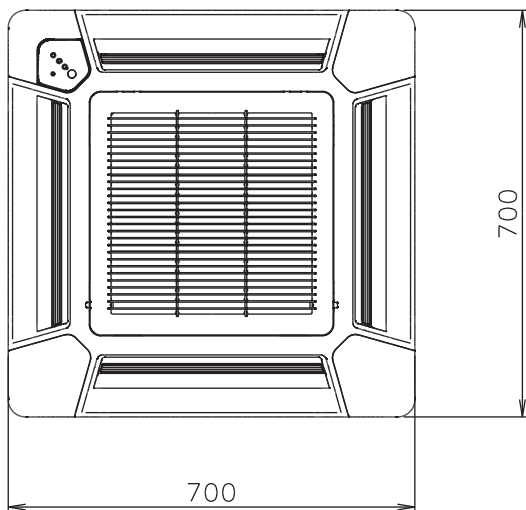


Bottom view (Panel)



Side view


■ INSTALLATION PLACE

(Unit : mm)

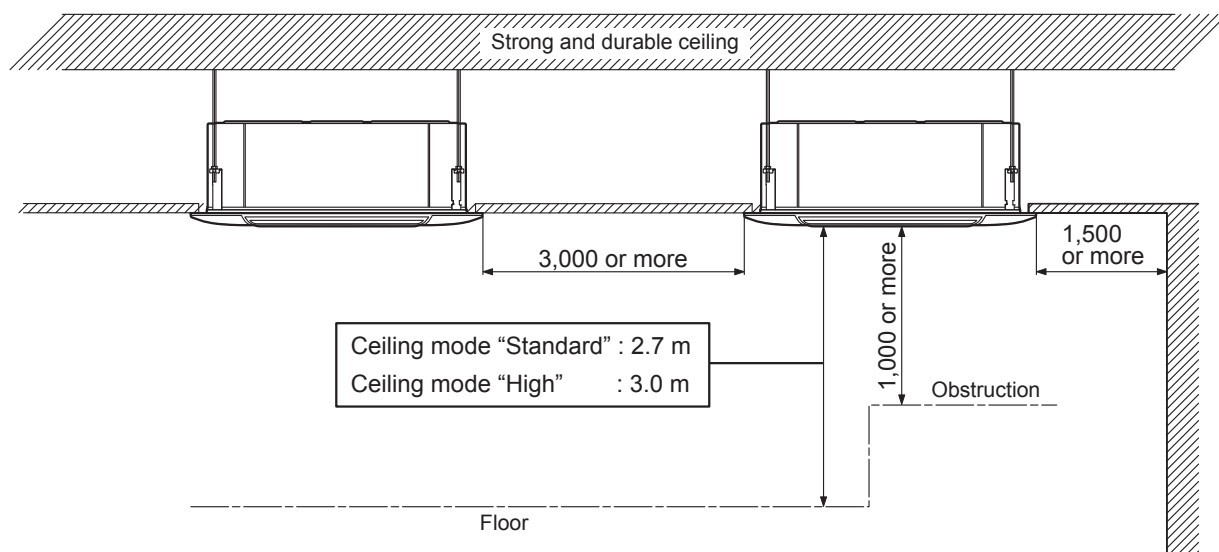

● 3-way directions setting

(Unit : mm)

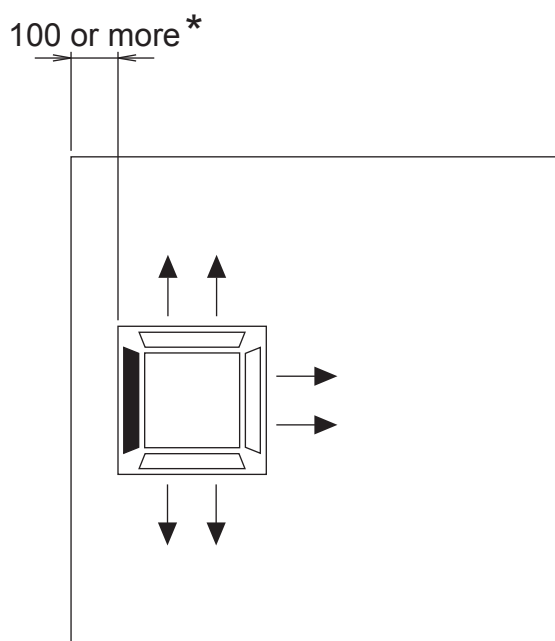


To set "3-way directions", the air outlet shutter plate (UTR-YDZA) sold separately must be installed and "outlet-direction" switched to "3-way" by remote controller.

*When installing the indoor unit, be careful about the maintenance hole

5. WIRING DIAGRAMS

■ MODEL : AU *A12L, AU *A14L

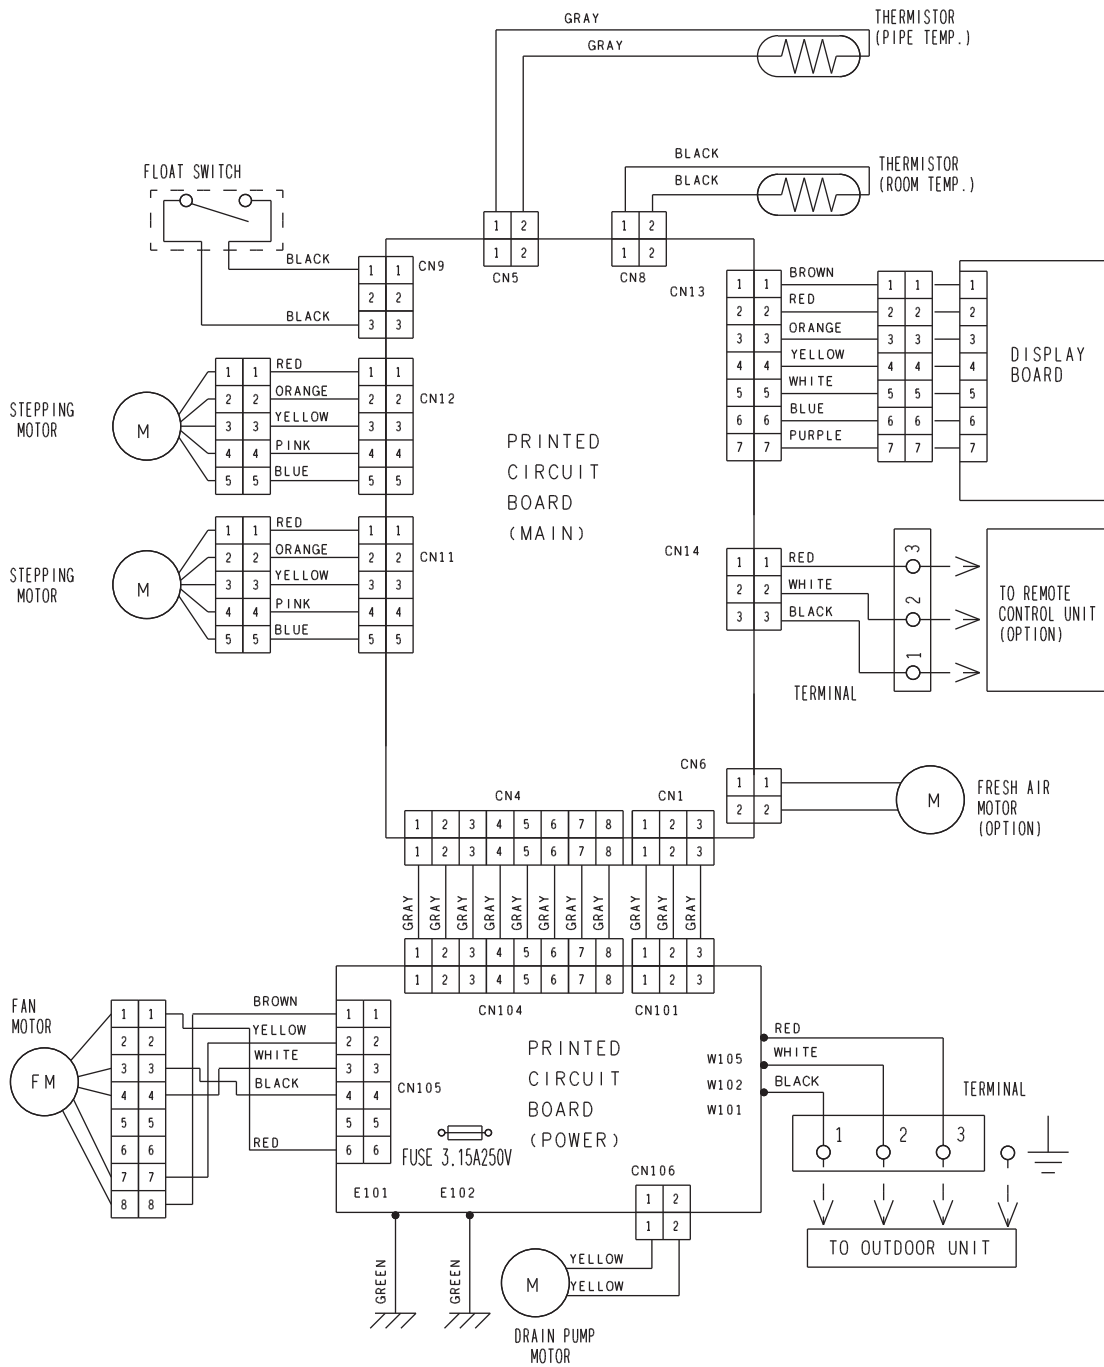

6. CAPACITY TABLE

6-1. COOLING CAPACITY

This table is created using the maximum capacity.

■ MODEL : AU *A12L

AFR	10.0
-----	------

		Indoor temperature																				
		°CDB			21			23			25			27			29			32		
		°CWB			15			16			18			19			21			23		
Outdoor temperature	°CDB	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI
	-10	3.47	3.22	0.29	3.87	3.24	0.30	4.00	3.52	0.30	4.26	3.53	0.30	4.40	3.81	0.30	4.66	3.80	0.31	4.92	4.05	0.31
	0	3.29	3.07	0.49	3.67	3.09	0.50	3.79	3.36	0.50	4.05	3.37	0.51	4.17	3.64	0.51	4.42	3.63	0.51	4.67	3.86	0.52
	5	3.30	3.07	0.47	3.67	3.09	0.48	3.80	3.36	0.48	4.05	3.37	0.49	4.17	3.64	0.49	4.42	3.63	0.50	4.67	3.86	0.50
	10	3.30	3.07	0.44	3.67	3.09	0.45	3.80	3.36	0.45	4.05	3.37	0.45	4.17	3.64	0.46	4.42	3.63	0.46	4.67	3.86	0.46
	15	3.19	2.99	0.53	3.56	3.01	0.54	3.68	3.27	0.54	3.92	3.28	0.55	4.04	3.54	0.55	4.28	3.53	0.56	4.53	3.76	0.56
	20	4.12	3.76	1.23	4.59	3.78	1.25	4.74	4.11	1.26	5.05	4.12	1.27	5.21	4.45	1.28	5.52	4.43	1.29	5.84	4.72	1.31
	25	3.95	3.62	1.37	4.40	3.64	1.40	4.55	3.96	1.40	4.85	3.97	1.42	5.00	4.29	1.42	5.30	4.27	1.44	5.60	4.55	1.45
	30	3.78	3.47	1.52	4.21	3.49	1.54	4.35	3.80	1.55	4.64	3.81	1.57	4.78	4.12	1.57	5.07	4.10	1.59	5.36	4.37	1.61
	35	3.48	3.22	1.54	3.87	3.24	1.56	4.00	3.52	1.57	4.27	3.54	1.59	4.40	3.82	1.60	4.66	3.80	1.61	4.93	4.05	1.63
	40	2.96	2.80	1.31	3.29	2.81	1.33	3.40	3.06	1.34	3.63	3.07	1.35	3.74	3.31	1.36	3.97	3.30	1.37	4.19	3.51	1.39
	46	2.19	2.17	1.00	2.44	2.18	1.02	2.52	2.38	1.03	2.68	2.38	1.04	2.77	2.57	1.04	2.93	2.56	1.05	3.10	2.73	1.06

■ MODEL : AU *A14L

AFR	11.3
-----	------

		Indoor temperature																				
		°CDB			21			23			25			27			29			32		
		°CWB			15			16			18			19			21			23		
Outdoor temperature	°CDB	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI
	-10	4.08	3.75	0.39	4.54	3.77	0.40	4.69	4.10	0.40	5.00	4.11	0.40	5.16	4.44	0.40	5.47	4.43	0.41	5.78	4.71	0.41
	0	3.98	3.68	0.45	4.44	3.70	0.46	4.59	4.02	0.46	4.89	4.03	0.47	5.04	4.35	0.47	5.34	4.34	0.48	5.65	4.62	0.48
	5	3.87	3.59	0.56	4.31	3.61	0.57	4.46	3.92	0.57	4.75	3.93	0.58	4.90	4.25	0.58	5.19	4.23	0.59	5.49	4.51	0.59
	10	3.74	3.48	0.66	4.17	3.50	0.67	4.31	3.81	0.68	4.60	3.82	0.68	4.74	4.13	0.69	5.02	4.11	0.70	5.31	4.38	0.70
	15	3.75	3.49	0.58	4.18	3.51	0.59	4.32	3.82	0.60	4.61	3.83	0.60	4.75	4.14	0.60	5.04	4.12	0.61	5.32	4.39	0.62
	20	4.72	4.27	1.23	5.26	4.30	1.25	5.44	4.67	1.25	5.79	4.69	1.27	5.97	5.06	1.27	6.33	5.04	1.29	6.69	5.37	1.30
	25	4.53	4.11	1.37	5.04	4.14	1.39	5.21	4.50	1.40	5.56	4.51	1.41	5.73	4.88	1.42	6.07	4.86	1.44	6.42	5.17	1.45
	30	4.32	3.95	1.52	4.81	3.97	1.54	4.98	4.32	1.55	5.30	4.33	1.56	5.47	4.68	1.57	5.80	4.66	1.59	6.12	4.96	1.60
	35	4.27	3.90	1.79	4.75	3.93	1.82	4.91	4.27	1.83	5.24	4.28	1.85	5.40	4.63	1.85	5.72	4.61	1.87	6.05	4.91	1.89
	40	3.28	3.12	1.28	3.66	3.13	1.30	3.78	3.41	1.30	4.03	3.42	1.32	4.16	3.69	1.32	4.41	3.68	1.34	4.66	3.92	1.35
	46	2.36	2.39	0.97	2.63	2.40	0.98	2.72	2.61	0.99	2.90	2.62	1.00	2.99	2.83	1.00	3.17	2.82	1.01	3.35	3.00	1.02

AFR : Air flow rate (m³/min)
 TC : Total capacity (kW)
 SHC : Sensible Heat capacity (kW)
 PI : Power Input (kW)

6-2. HEATING CAPACITY

This table is created using the maximum capacity.

■ MODEL : AU *A12L

AFR	10.0
-----	------

		°CDB	Indoor temperature									
			16		18		20		22		24	
Outdoor temperature	°CDB	°CWB	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
	-15	-16	3.76	1.87	3.67	1.91	3.58	1.95	3.49	1.99	3.40	2.03
	-10	-11	4.26	1.87	4.16	1.91	4.06	1.95	3.96	1.99	3.86	2.03
	-5	-7	4.69	2.15	4.58	2.19	4.47	2.23	4.35	2.28	4.20	2.30
	0	-2	5.30	2.14	5.17	2.18	5.05	2.23	4.92	2.27	4.76	2.30
	5	3	5.79	2.15	5.65	2.19	5.51	2.24	5.38	2.28	5.18	2.30
	7	6	5.99	2.07	5.85	2.11	5.70	2.15	5.56	2.20	5.42	2.24
	10	8	6.05	1.84	5.91	1.87	5.76	1.91	5.62	1.95	5.47	1.99
	15	10	6.08	1.76	5.93	1.80	5.79	1.84	5.64	1.87	5.50	1.91
	20	15	5.87	1.48	5.73	1.51	5.59	1.54	5.45	1.57	5.31	1.61
	24	18	5.86	1.48	5.72	1.51	5.58	1.54	5.44	1.57	5.30	1.60


■ MODEL : AU *A14L

AFR	14.7
-----	------



		°CDB	Indoor temperature									
			16		18		20		22		24	
Outdoor temperature	°CDB	°CWB	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
	-15	-16	4.24	2.16	4.14	2.21	4.04	2.25	3.94	2.30	3.84	2.34
	-10	-11	4.88	2.16	4.76	2.21	4.65	2.25	4.53	2.30	4.41	2.34
	-5	-7	5.49	2.40	5.36	2.45	5.23	2.50	5.10	2.55	4.97	2.60
	0	-2	6.37	2.73	6.22	2.79	6.07	2.84	5.87	2.88	5.61	2.88
	5	3	6.97	2.71	6.80	2.77	6.64	2.83	6.47	2.88	6.18	2.88
	7	6	6.82	2.36	6.66	2.40	6.50	2.45	6.34	2.50	6.17	2.55
	10	8	7.03	2.37	6.86	2.42	6.70	2.47	6.53	2.52	6.36	2.56
	15	10	6.75	2.07	6.59	2.12	6.43	2.16	6.27	2.20	6.11	2.25
	20	15	6.22	1.59	6.07	1.63	5.92	1.66	5.77	1.69	5.62	1.73
	24	18	6.40	1.60	6.25	1.64	6.10	1.67	5.94	1.70	5.79	1.74

AFR : Air flow rate (m³/min)
 TC : Total capacity (kW)
 PI : Power Input (kW)

● 3-WAY AIR OUTLET

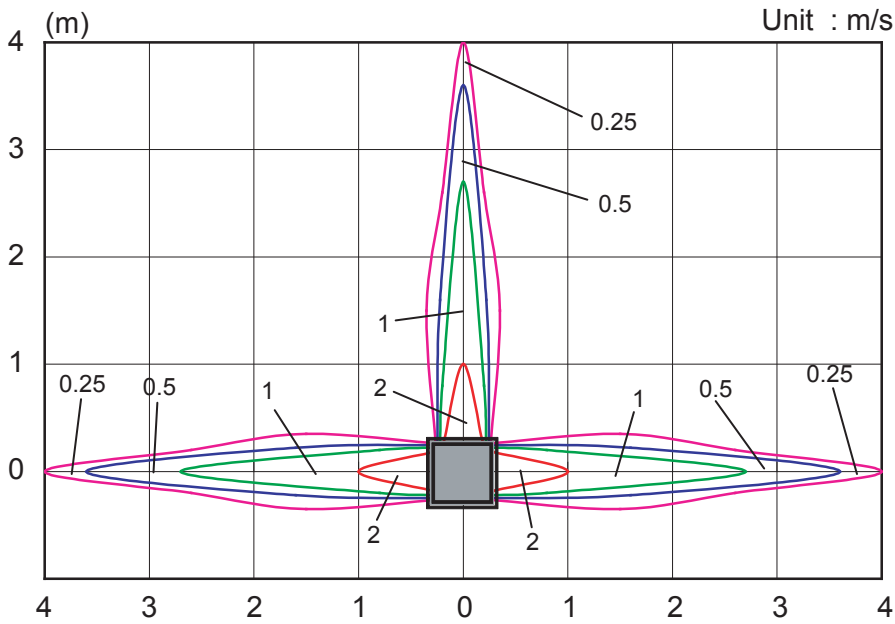


Note :
Condition
Fan speed : High
Operation mode : FAN
Ceiling mode : Standard

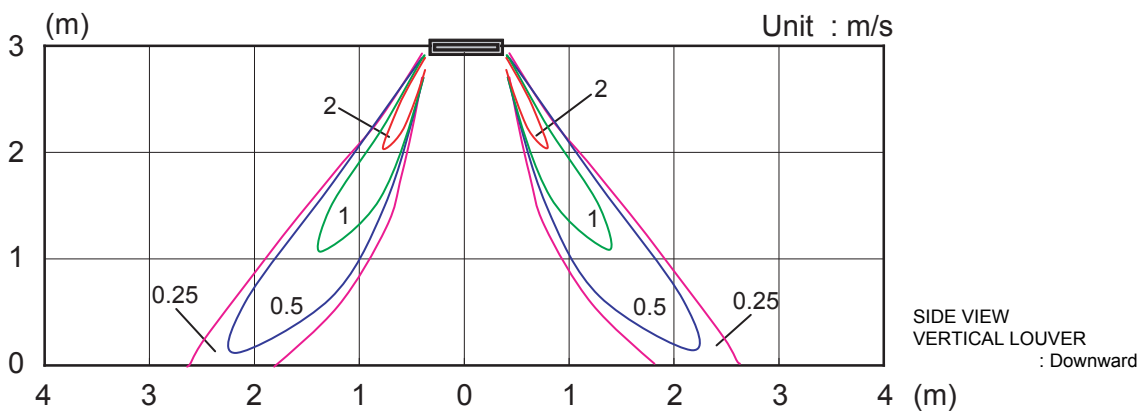
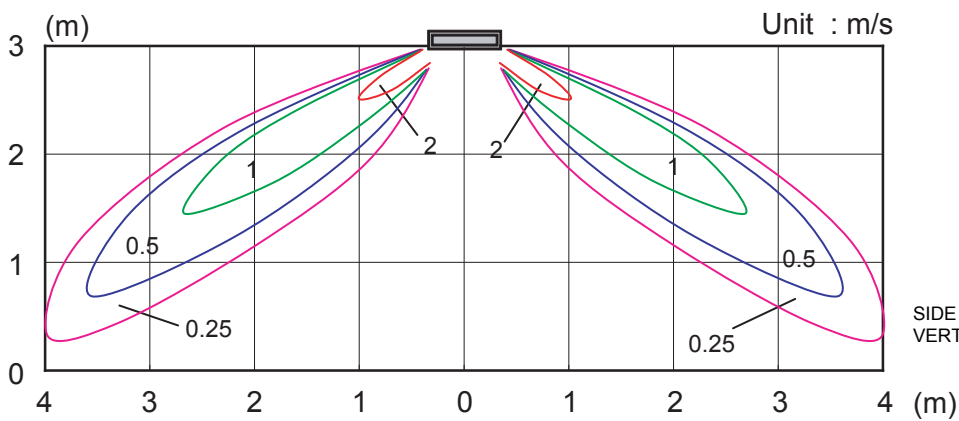


MODEL : AU *A14L


4-WAY AIR OUTLET

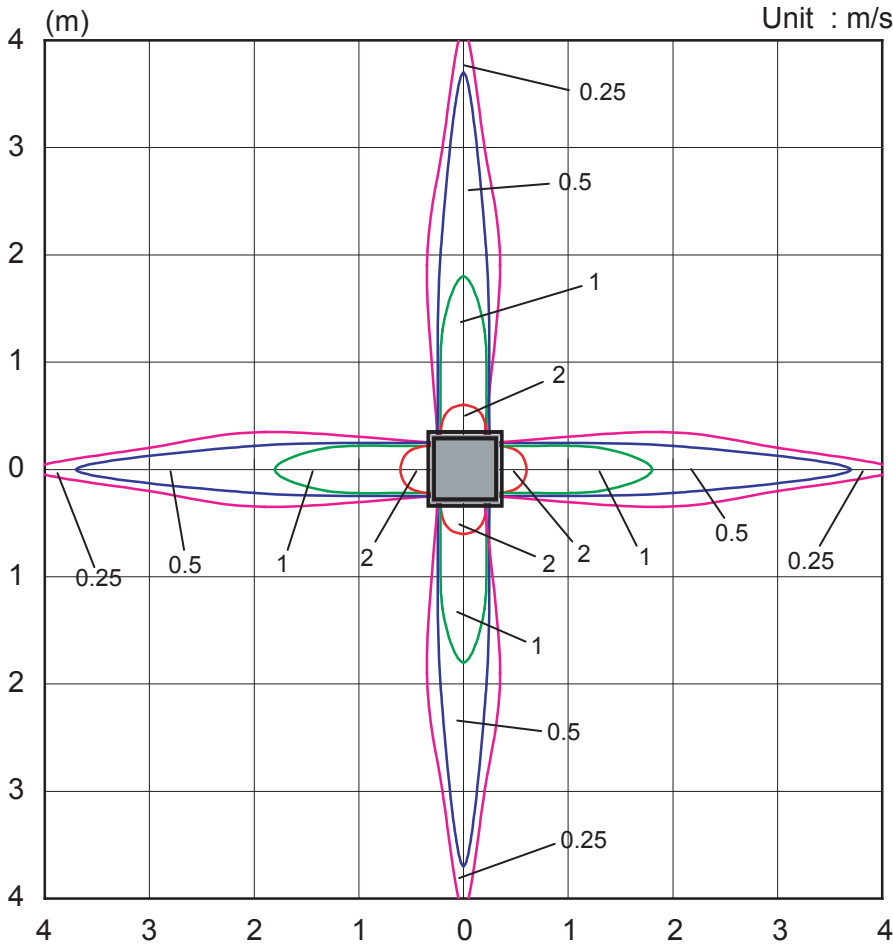



Note :
Condition
Fan speed : High
Operation mode : FAN
Ceiling mode : Standard

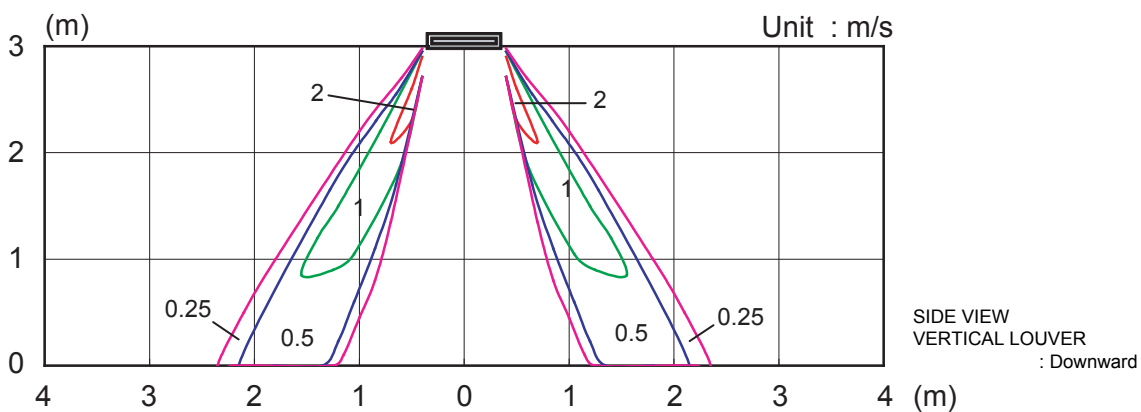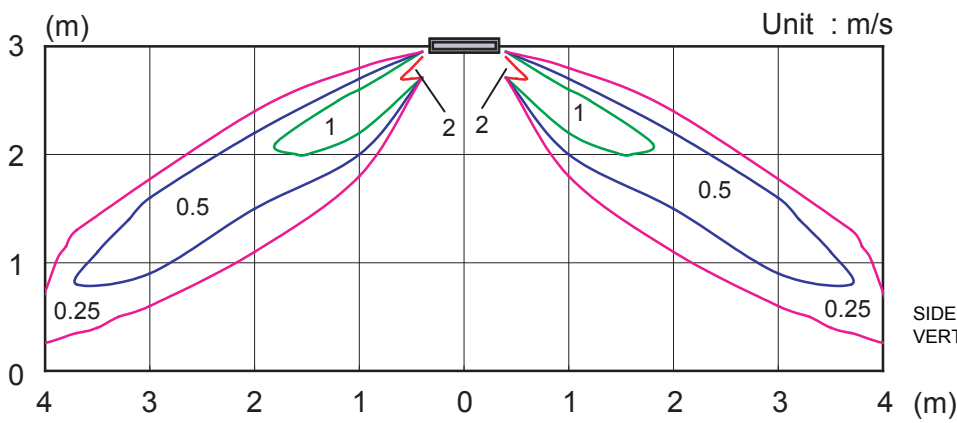

● 3-WAY AIR OUTLET

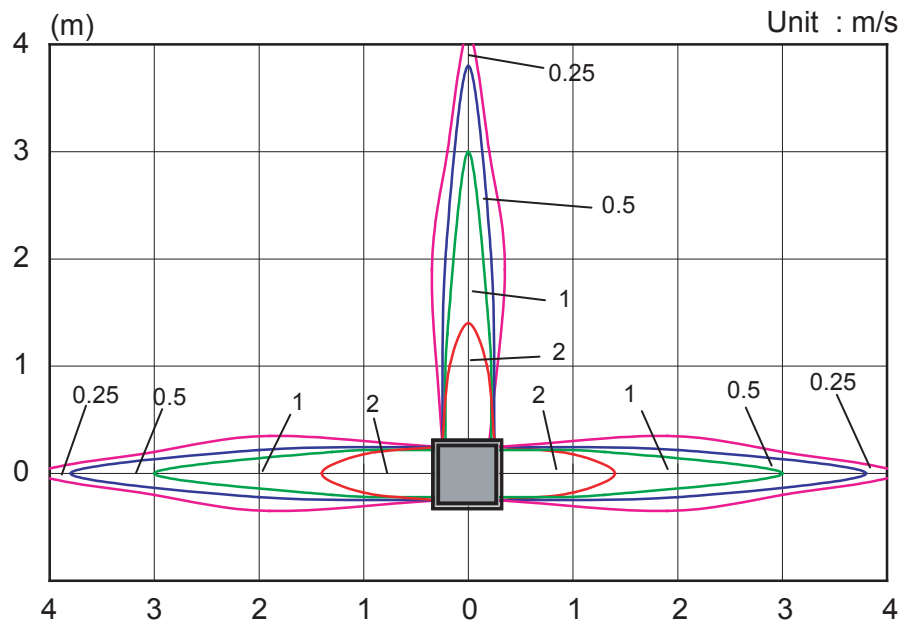

Note :
Condition
Fan speed : High
Operation mode : FAN
Ceiling mode : Standard

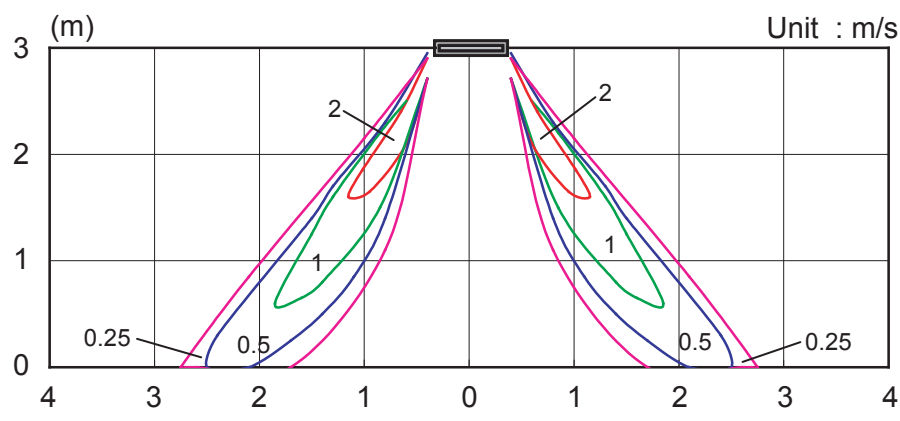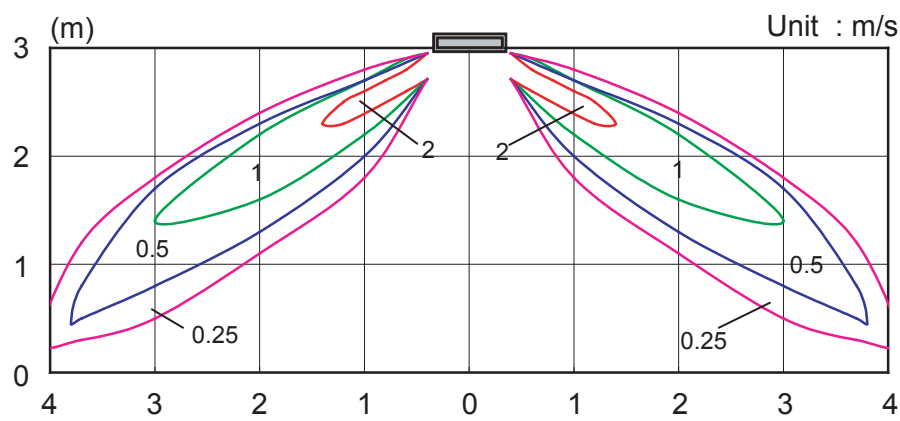

7-2. AIR FLOW

7-2-1. STANDARD CEILING MODE

■ MODEL : AU*A12L

● COOLING

Fan speed	Number of rotations (r.p.m)	Air flow	
		m ³ /h	l/s
HIGH	650	m ³ /h	600
		l/s	167
		CFM	353
MED	580	m ³ /h	530
		l/s	147
		CFM	312
LOW	520	m ³ /h	470
		l/s	131
		CFM	277
QUIET	460	m ³ /h	410
		l/s	114
		CFM	241

● HEATING

Fan speed	Number of rotations (r.p.m)	Air flow	
		m ³ /h	l/s
HIGH	650	m ³ /h	600
		l/s	167
		CFM	353
MED	580	m ³ /h	530
		l/s	147
		CFM	312
LOW	520	m ³ /h	470
		l/s	131
		CFM	277
QUIET	460	m ³ /h	410
		l/s	114
		CFM	241

■ **MODEL : AU*A14L**

● **COOLING**

Fan speed	Number of rotations (r.p.m)	Air flow	
		m ³ /h	l/s
HIGH	730	m ³ /h	680
		l/s	189
		CFM	400
MED	630	m ³ /h	580
		l/s	161
		CFM	341
LOW	540	m ³ /h	490
		l/s	136
		CFM	288
QUIET	460	m ³ /h	410
		l/s	114
		CFM	241

● **HEATING**

Fan speed	Number of rotations (r.p.m)	Air flow	
		m ³ /h	l/s
HIGH	830	m ³ /h	800
		l/s	222
		CFM	471
MED	730	m ³ /h	680
		l/s	189
		CFM	400
LOW	630	m ³ /h	580
		l/s	161
		CFM	341
QUIET	500	m ³ /h	450
		l/s	125
		CFM	265

7-2-2. HIGH CEILING MODE

■ MODEL : AU*A12L

● COOLING

Fan speed	Number of rotations (r.p.m)	Air flow	
		m ³ /h	l/s
HIGH	750	m ³ /h	700
		l/s	194
		CFM	412
MED	680	m ³ /h	630
		l/s	175
		CFM	371
LOW	620	m ³ /h	570
		l/s	158
		CFM	335
QUIET	460	m ³ /h	410
		l/s	114
		CFM	241

● HEATING

Fan speed	Number of rotations (r.p.m)	Air flow	
		m ³ /h	l/s
HIGH	750	m ³ /h	700
		l/s	194
		CFM	412
MED	680	m ³ /h	630
		l/s	175
		CFM	371
LOW	620	m ³ /h	570
		l/s	158
		CFM	335
QUIET	460	m ³ /h	410
		l/s	114
		CFM	241

■ **MODEL : AU*A14L**

● **COOLING**

Fan speed	Number of rotations (r.p.m)	Air flow	
		m ³ /h	l/s
HIGH	830	m ³ /h	800
		l/s	222
		CFM	471
MED	730	m ³ /h	680
		l/s	189
		CFM	400
LOW	640	m ³ /h	590
		l/s	164
		CFM	347
QUIET	460	m ³ /h	410
		l/s	114
		CFM	241

● **HEATING**


Fan speed	Number of rotations (r.p.m)	Air flow	
		m ³ /h	l/s
HIGH	930	m ³ /h	900
		l/s	250
		CFM	530
MED	830	m ³ /h	800
		l/s	222
		CFM	471
LOW	730	m ³ /h	680
		l/s	189
		CFM	400
QUIET	500	m ³ /h	450
		l/s	125
		CFM	265

8. OPERATION NOISE


8-1. NOISE LEVEL CURVE

■ COOLING

● MODEL : AU *A12L

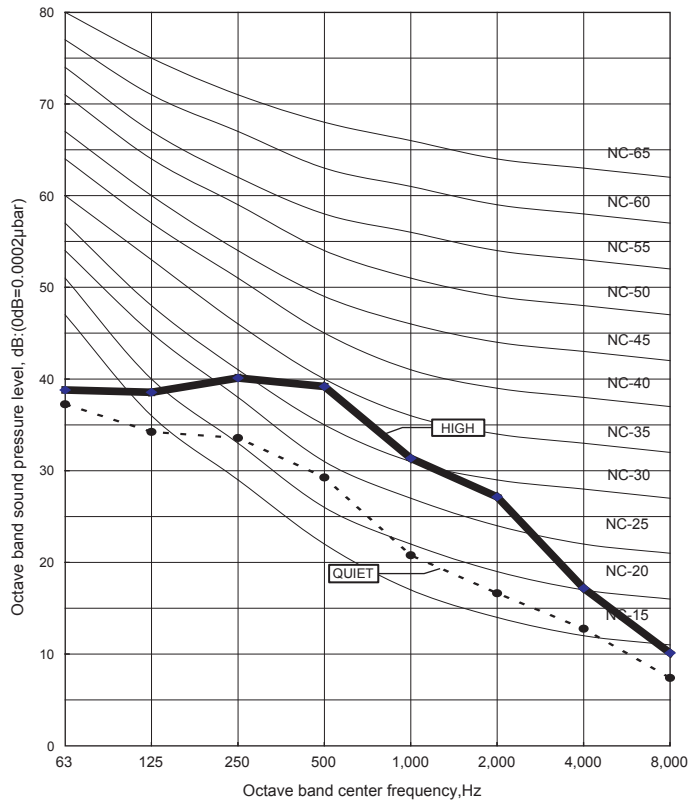


● MODEL : AU *A14L

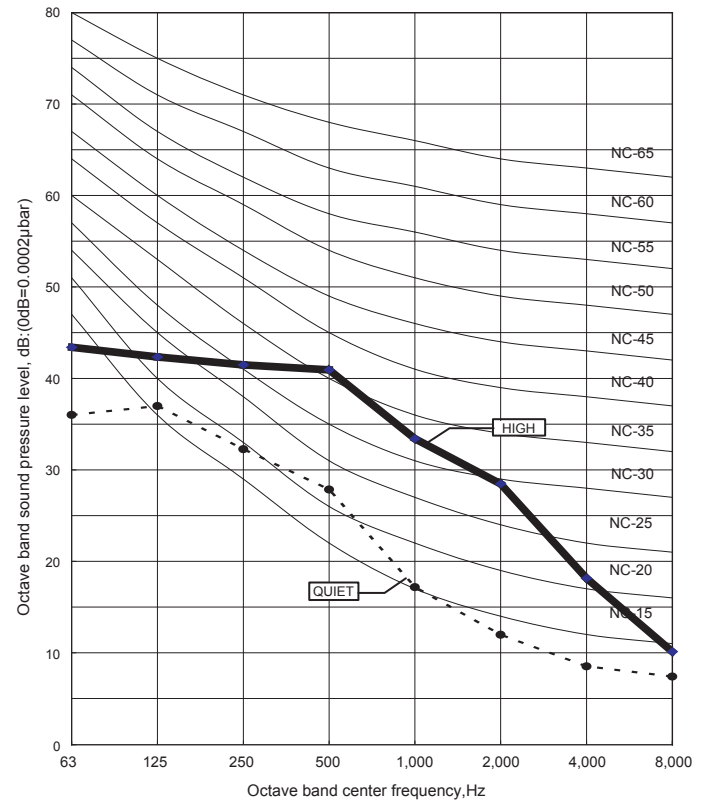


■ HEATING



● MODEL : AU *A12L

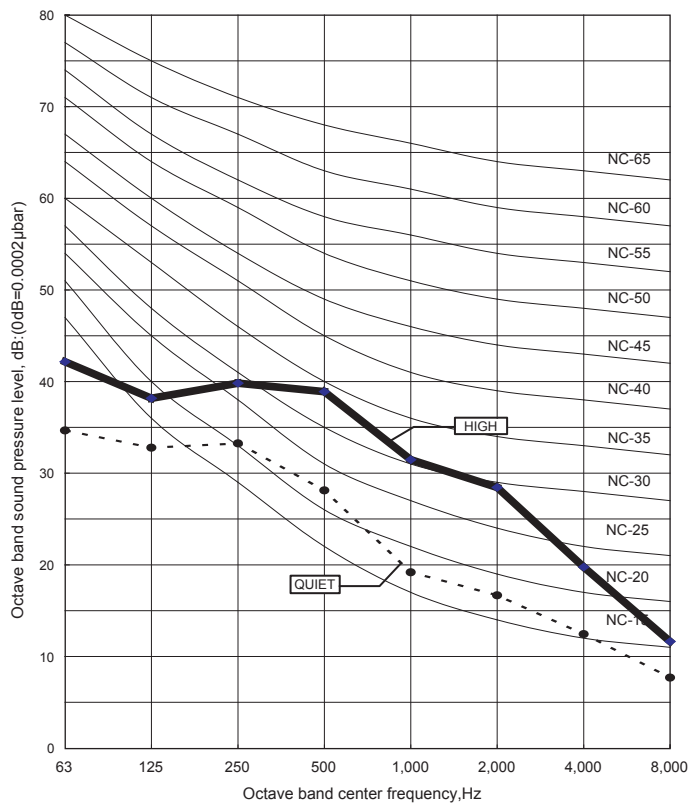

● MODEL : AU *A14L

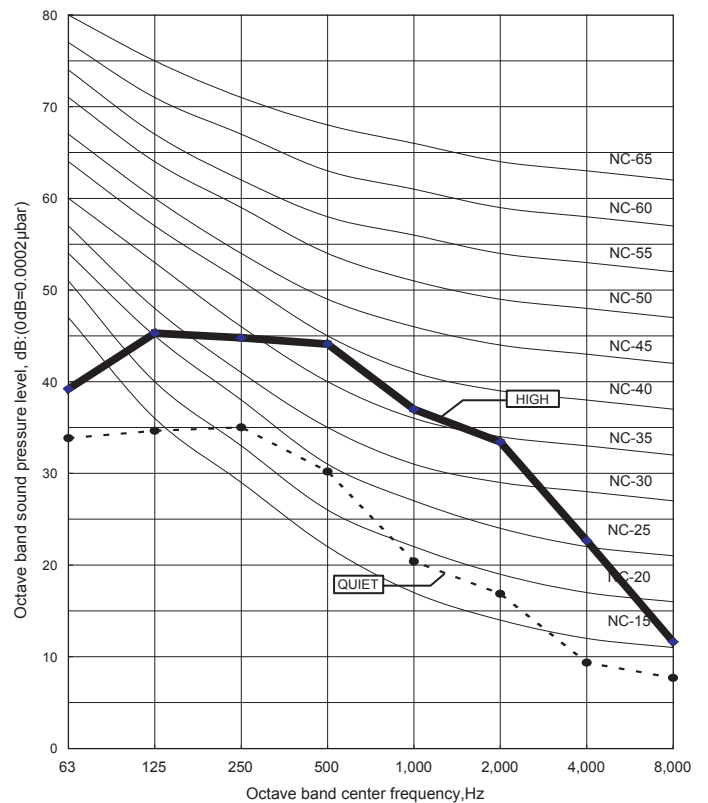

8-2. SOUND LEVEL CHECK POINT

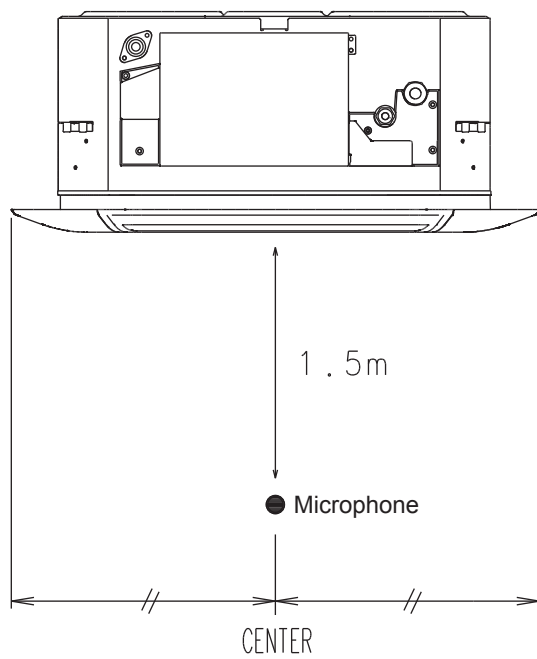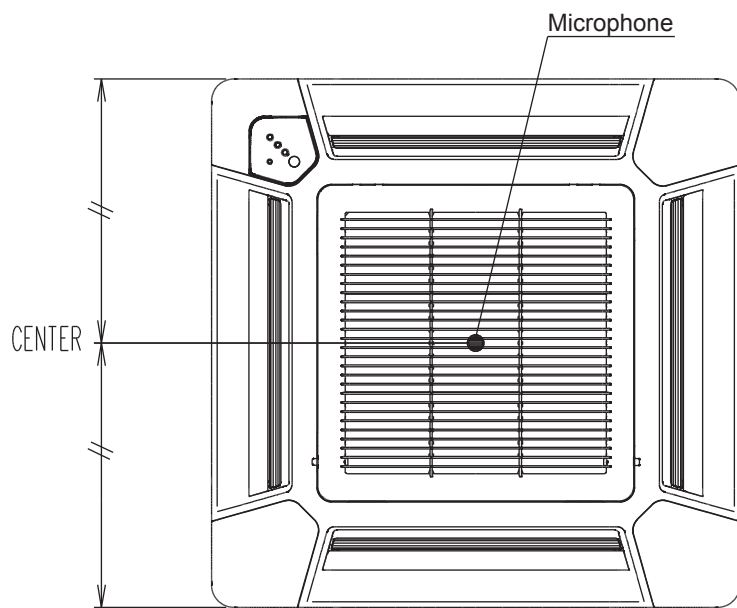





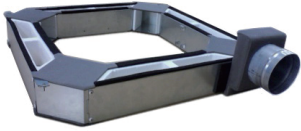
9. ELECTRIC CHARACTERISTICS

Model name			AU * A12L	AU * A14L
Power supply	Voltage	V	230 ~	
	Frequency	Hz	50	
Max. operating current (Indoor unit)		A	0.2	0.3
Wiring spec. (Indoor unit to outdoor unit)	Connection cable	mm ²	1.5-2.5	1.5-2.5
	Limited wiring length	m	26	26

10. SAFETY DEVICES

	Protection form	Model	
		AU * A12L	AU * A14L
Circuit protection	Current fuse (PCB)	3.15A 250V	
Fan motor protection	Thermal protection program	140±20°C OFF 110±20°C ON	

11. OPTIONAL PARTS

Exterior	Parts name	Model No.	Summary
	Wired remote controller	UTB-*UD	Unit control is performed by wired remote controller
	Wireless remote controller	UTB-*NA	Unit control is performed by wireless remote controller
	Decoration panel	UTG-UF*A-F	Ceiling dirt by discharged wind was made difficult to cling by reviewing the shape of the LOUVER.
	Air outlet shutter plate	UTR-YDZA	Air outlet shutter plate is installed at the air outlet when 3-way direction is performed.
	Fresh air intake kit	UTZ-VXAA	It can be taken in fresh air of up to 10% of "high" air volume of the indoor unit by attaching Fresh Air Intake Kit to cassette type indoor unit.

OUTDOOR UNIT

2. SINGLE TYPE :

AO * A12LACL

AO * A12LALL

AO * A14LACL

AO * A14LALL

1. SPECIFICATIONS

Type			INVERTER HEATPUMP	
Model name			AO * A12LACL AO * A12LALL	AO * A14LACL AO * A14LALL
Power source			230V~ 50Hz	
Available voltage range			198-264V~ 50Hz	
Starting current		A	4.9	5.9
Fan	Airflow rate	Cooling	1780	1910
		Heating	1630	1740
	Type × Q'ty		Propeller × 1	
	Motor output		W	54
Sound pressure level		Cooling	47	49
		Heating	48	49
Heat exchanger type		Dimensions (H × W × D)	546 × 876 × 18.2 546 × 842 × 18.2	
		Fin pitch	1.30	
		Rows x Stages	2 × 26	
		Pipe type	Copper	
		Fin type	Aluminium	
Compressor	Type × Q'ty		Twin Rotary × 1	
	Motor output		W	1100
Refrigerant		Type	R410A	
		Charge	g	1150 1250
Refrigerant oil		Type	POE	
Enclosure		Material	Steel sheet	
		Colour	Beige (10YR7.5/1.0NN)	
Dimensions (H × W × D)	Net		578 × 790 × 300	
	Gross		648 × 910 × 380	
Weight	Net		40 (88)	40 (88)
	Gross		44 (97)	44 (97)
Connection pipe	Size	Liquid	Φ 6.35 (Φ 1/4 in.)	
		Gas	Φ 9.52 (Φ 3/8 in.)	Φ 12.70 (Φ 1/2 in.)
	Method		Flare	
	Max. length		25 (chargeless : 15)	
	Max. height difference		m	15
Operation range		Cooling	-10 to 46	
		Heating	-15 to 24	

Note :

Specifications are based on the following conditions.

Cooling : Indoor temperature of 27°CDB/19°CWB. and outdoor temperature of 35°CDB/24°CWB.


Heating : Indoor temperature of 20°CDB/15°CWB. and outdoor temperature of 7°CDB/6°CWB.

Pipe length : 7.5 m, Height difference : 0 m. (Outdoor unit - Indoor unit)


2. DIMENSIONS

■ MODEL : AO*A12L, AO*A14L


(Unit : mm)

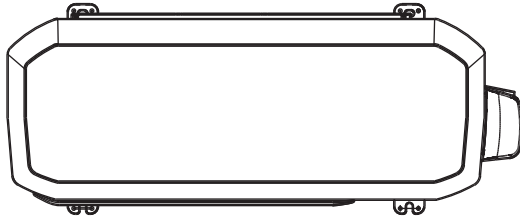


Top view

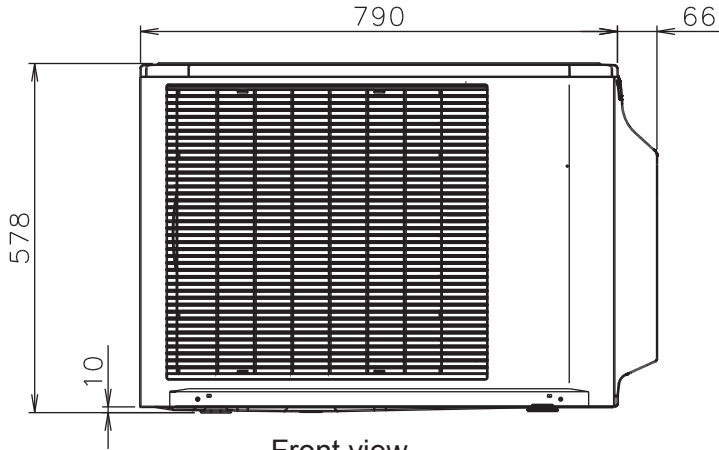


Front view

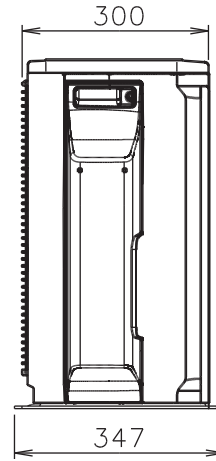

Side view

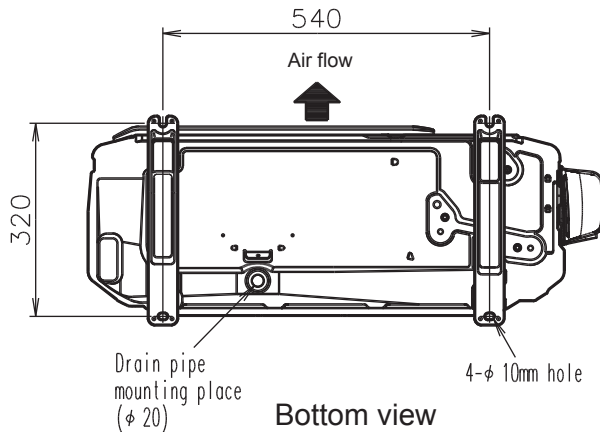

Bottom view





■ MOUNTING POSITION

When there are obstacles at the back or front sides.

When there are obstacles at the back, side(s), and top.

When there are obstacles at the back, side with the installation of more than one unit.

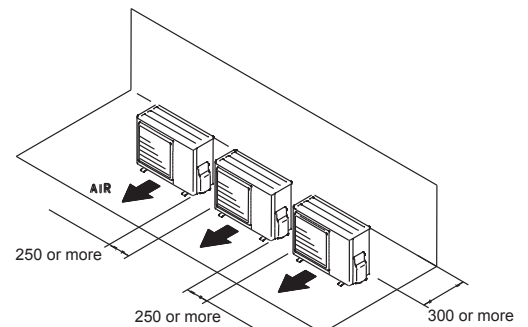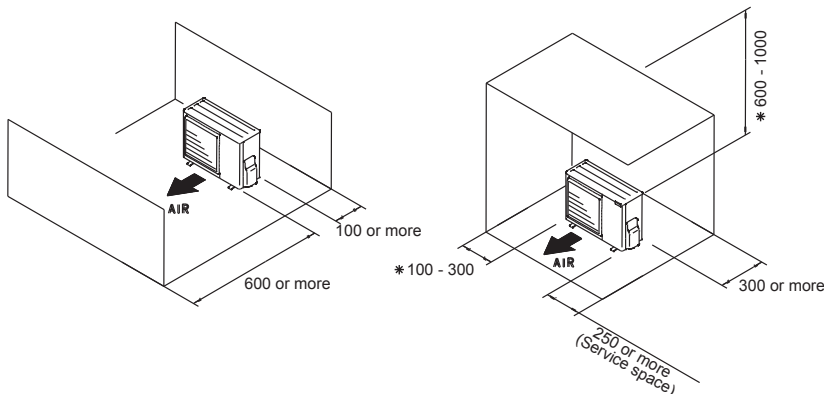


* If the space is larger than that is stated, the condition will be the same as that are no obstacles.

3. REFRIGERANT CIRCUIT

■ MODEL : AO*A12L, AO*A14L

OUTDOOR UNIT
AO*A12-14L

OUTDOOR UNIT
AO*A12-14L

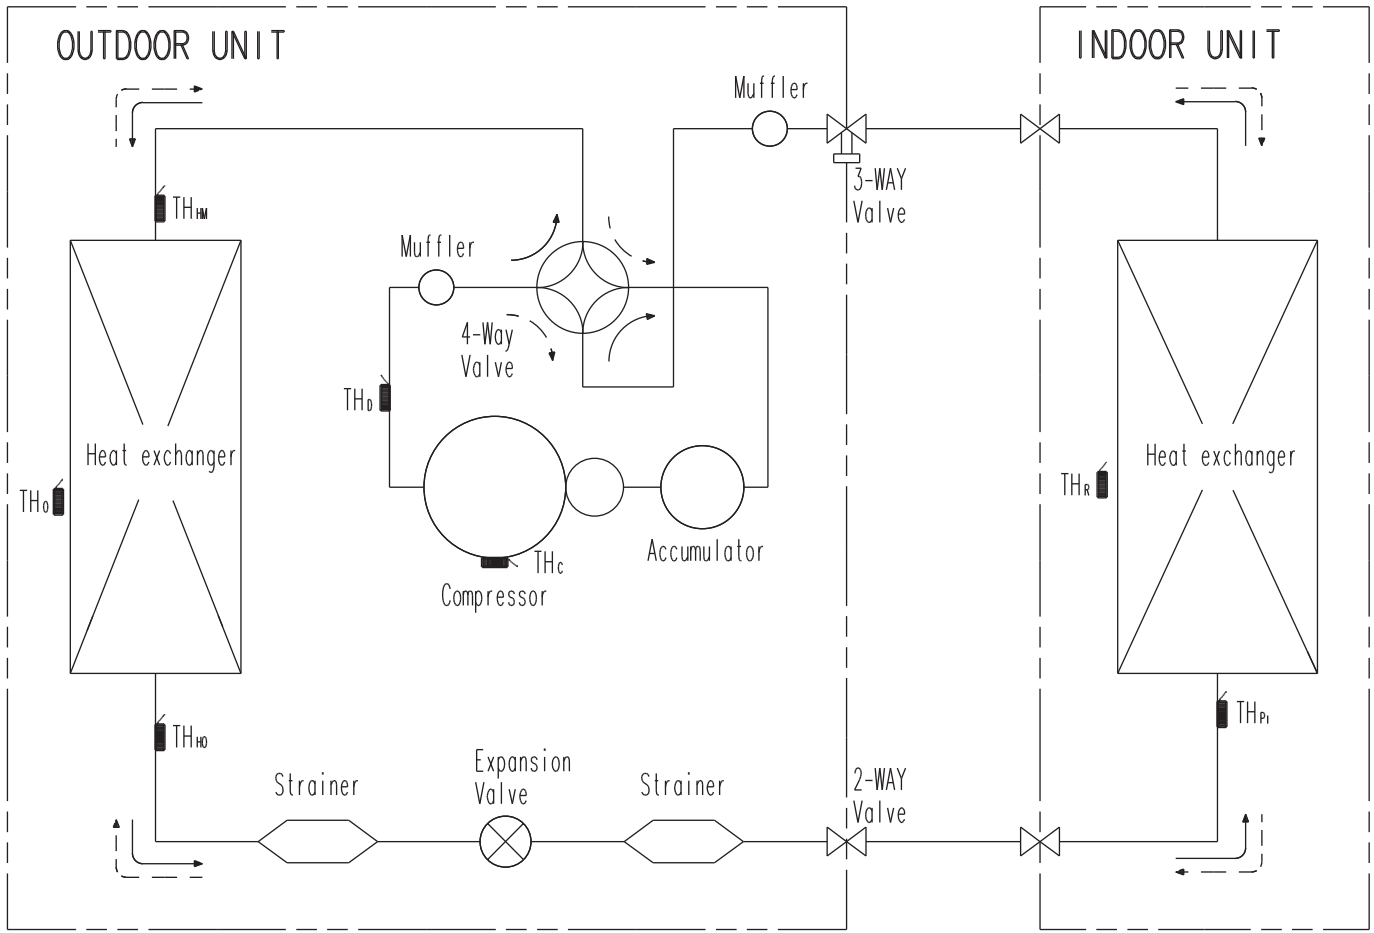


4. WIRING DIAGRAMS

■ MODEL : AO*A12L, AO*A14L

OUTDOOR UNIT
AO*A12-14L

OUTDOOR UNIT
AO*A12-14L

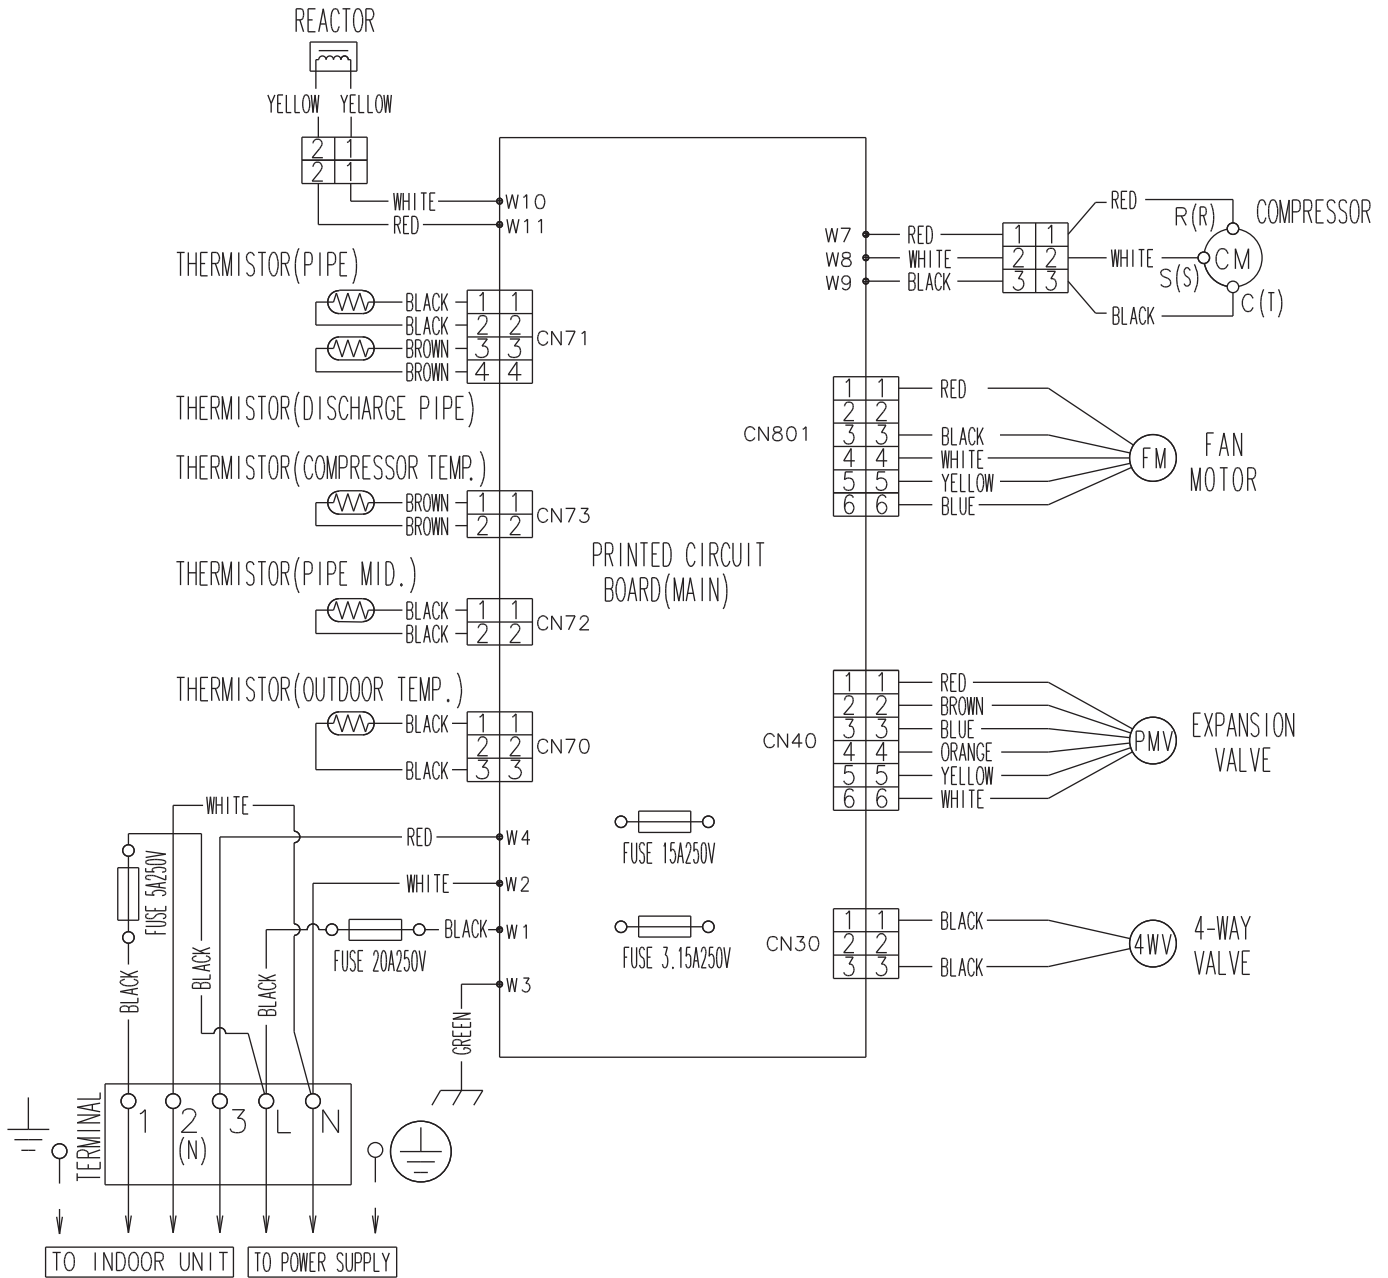

5. CAPACITY COMPENSATION RATE FOR PIPE LENGTH AND HEIGHT DIFFERENCE

This table is created using the maximum capacity.

■ MODEL : AO *A12L



OUTDOOR UNIT
AO*A12-14L

OUTDOOR UNIT
AO*A12-14L

COOLING			Pipe length (m)					
			5	7.5	10	15	20	25
Height difference H (m)	* 1 Indoor unit is upper than outdoor unit.	15	-	-	-	0.903	0.894	0.867
		10	-	-	0.964	0.918	0.909	0.881
		7.5	-	0.988	0.968	0.922	0.912	0.885
		5	1.018	0.992	0.972	0.925	0.916	0.888
	* 2 Indoor unit is under than outdoor unit	0	1.026	1.000	0.980	0.933	0.923	0.895
		-5	1.026	1.000	0.980	0.933	0.923	0.895
		-7.5	-	1.000	0.980	0.933	0.923	0.895
		-10	-	-	0.980	0.933	0.923	0.895
		-15	-	-	-	0.933	0.923	0.895

HEATING			Pipe length (m)					
			5	7.5	10	15	20	25
Height difference H (m)	* 1 Indoor unit is upper than outdoor unit.	15	-	-	-	0.943	0.916	0.896
		10	-	-	1.010	0.943	0.916	0.896
		7.5	-	1.000	1.010	0.943	0.916	0.896
		5	0.954	1.000	1.010	0.943	0.916	0.896
	* 2 Indoor unit is under than outdoor unit	0	0.954	1.000	1.010	0.943	0.916	0.896
		-5	0.949	0.995	1.005	0.939	0.912	0.892
		-7.5	-	0.993	1.002	0.936	0.909	0.890
		-10	-	-	0.999	0.934	0.907	0.887
		-15	-	-	-	0.925	0.898	0.878

Height difference H

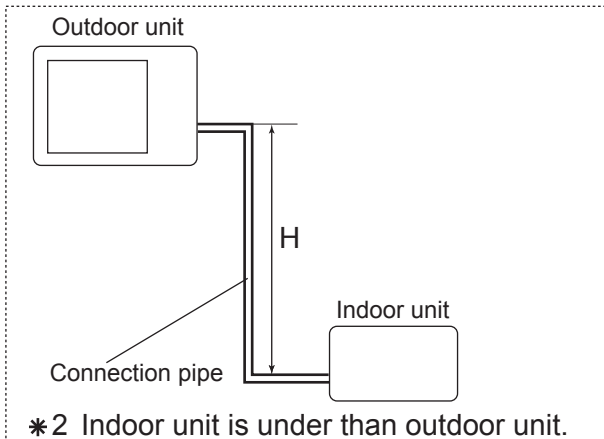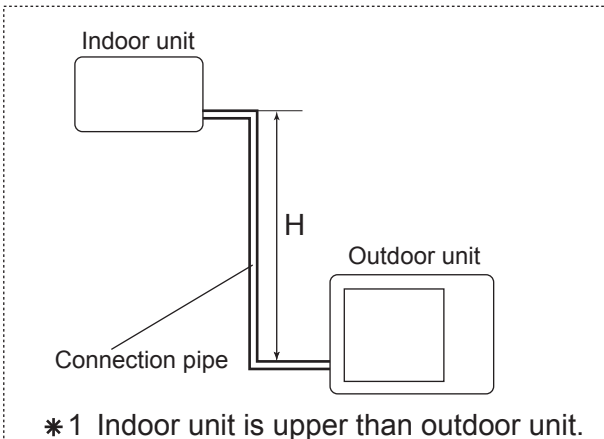



This table is created using the maximum capacity.

■ **MODEL : AO *A14L**

COOLING			Pipe length (m)					
			5	7.5	10	15	20	25
Height difference H (m)	* 1 Indoor unit is upper than outdoor unit.	15	-	-	-	0.953	0.950	0.947
		10	-	-	0.983	0.968	0.966	0.962
		7.5	-	0.988	0.987	0.972	0.970	0.966
		5	0.992	0.992	0.991	0.976	0.974	0.970
	* 2 Indoor unit is under than outdoor unit	0	1.000	1.000	0.999	0.984	0.982	0.978
		-5	1.000	1.000	0.999	0.984	0.982	0.978
		-7.5	-	1.000	0.999	0.984	0.982	0.978
		-10	-	-	0.999	0.984	0.982	0.978
		-15	-	-	-	0.984	0.982	0.978

HEATING			Pipe length (m)					
			5	7.5	10	15	20	25
Height difference H (m)	* 1 Indoor unit is upper than outdoor unit.	15	-	-	-	0.918	0.891	0.862
		10	-	-	0.981	0.918	0.891	0.862
		7.5	-	1.000	0.981	0.918	0.891	0.862
		5	0.994	1.000	0.981	0.918	0.891	0.862
	* 2 Indoor unit is under than outdoor unit	0	0.994	1.000	0.981	0.918	0.891	0.862
		-5	0.989	0.995	0.976	0.914	0.886	0.858
		-7.5	-	0.993	0.974	0.912	0.884	0.856
		-10	-	-	0.972	0.909	0.882	0.854
		-15	-	-	-	0.900	0.873	0.845

Height difference H

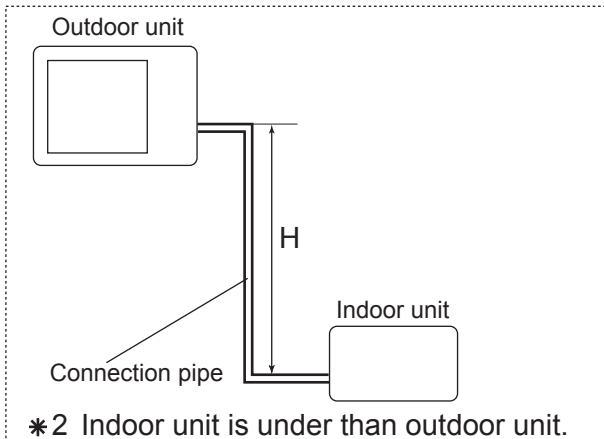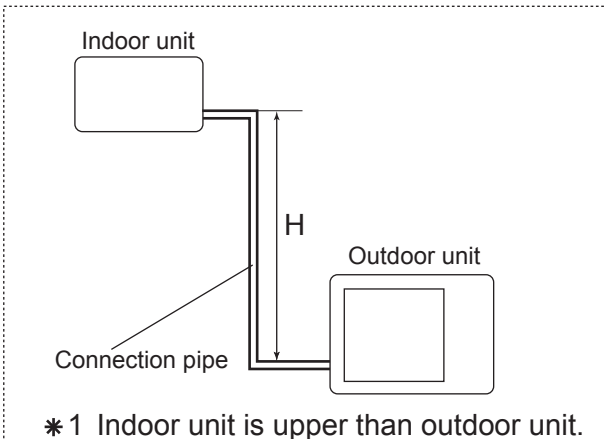

6. ADDITIONAL CHARGE CALCULATION

■ MODEL : AO*A12L

Refrigerant type		R410A
Refrigerant amount	g	1150

● REFRIGERANT CHARGE

Pipe length	m	~ 15	20	25	20g/m
Additional charge	g	0 (Chargeless)	+100	+200	

■ MODEL : AO*A14L

Refrigerant type		R410A
Refrigerant amount	g	1250

● REFRIGERANT CHARGE

Pipe length	m	~ 15	20	25	20g/m
Additional charge	g	0 (Chargeless)	+100	+200	

7. AIR FLOW

■ MODEL : AO *A12L

● COOLING

Number of rotations (r.p.m)	Air flow	
	770	m ³ /h
l/s		494
CFM		1048

● HEATING

Number of rotations (r.p.m)	Air flow	
	700	m ³ /h
l/s		453
CFM		959

■ MODEL : AO *A14L

● COOLING

Number of rotations (r.p.m)	Air flow	
	820	m ³ /h
l/s		531
CFM		1124

● HEATING


Number of rotations (r.p.m)	Air flow	
	750	m ³ /h
l/s		483
CFM		1024

8. OPERATION NOISE


8-1. NOISE LEVEL CURVE

■ COOLING

● MODEL : AO*A12L

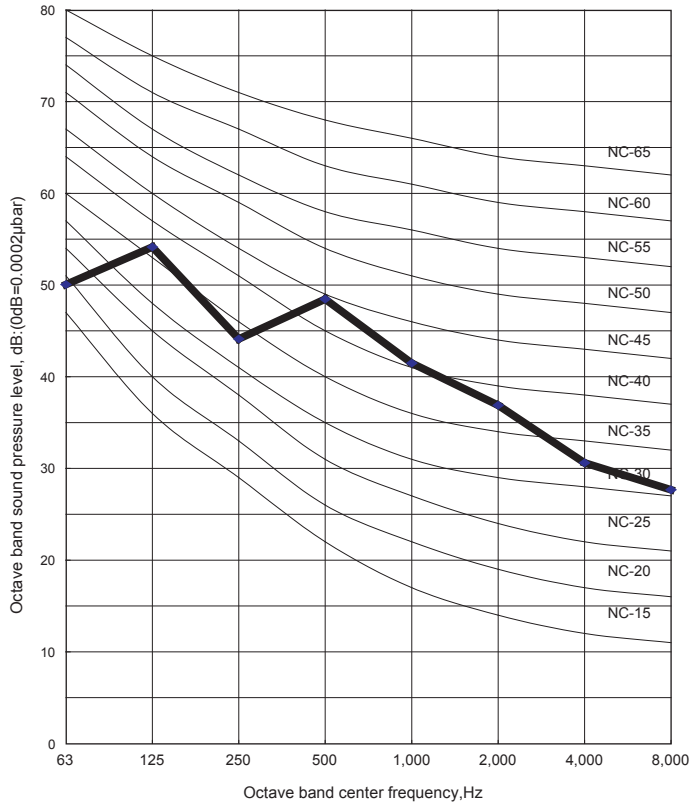


● MODEL : AO*A14L

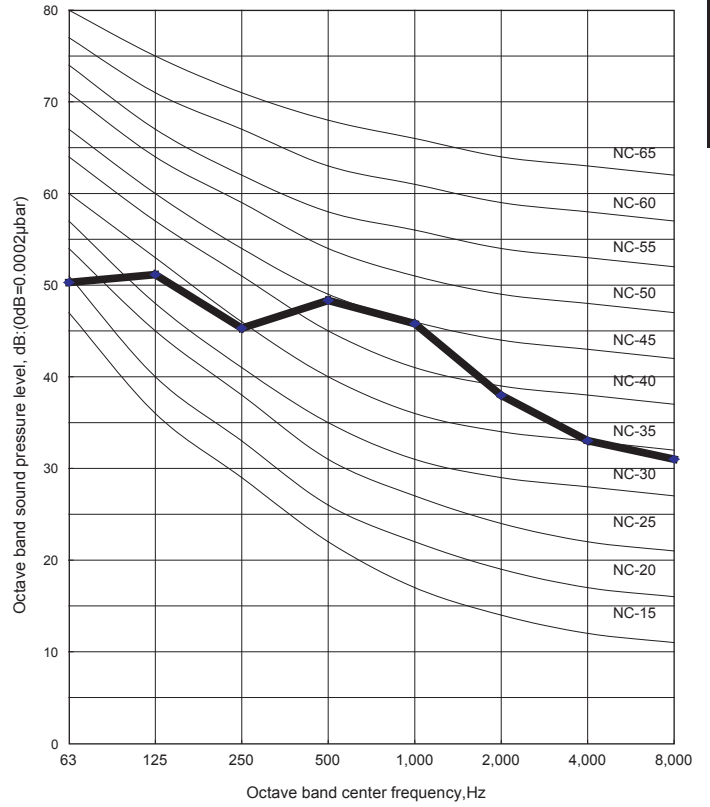


■ HEATING

● MODEL : AO*A12L

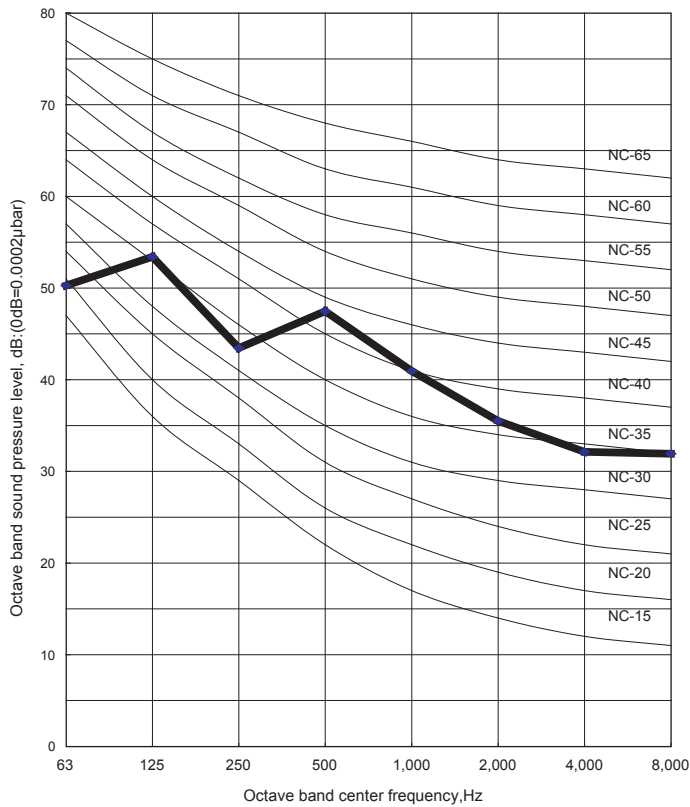

● MODEL : AO*A14L


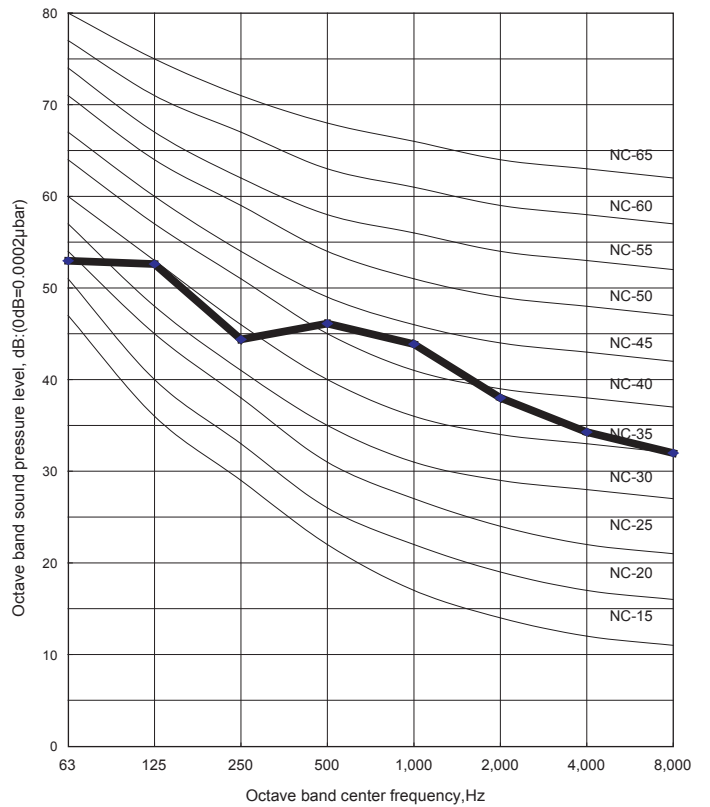


OUTDOOR UNIT
AO*A12-14L

OUTDOOR UNIT
AO*A12-14L

8-2. SOUND LEVEL CHECK POINT

OUTDOOR UNIT
AO*#A12-14L

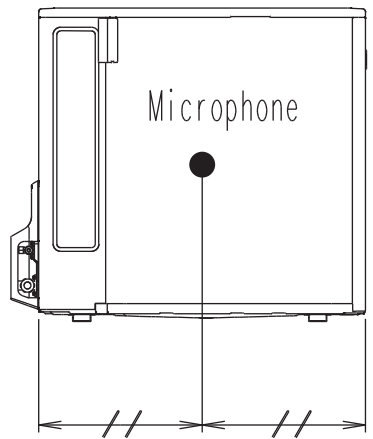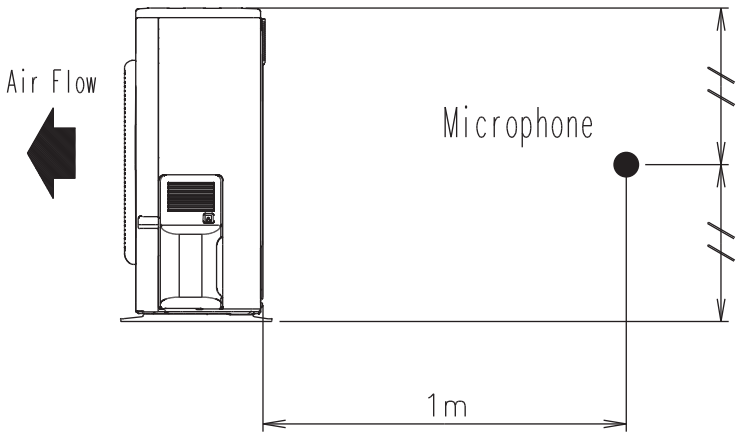

OUTDOOR UNIT
AO*#A12-14L

9. ELECTRIC CHARACTERISTICS

Model Name			AO * A12L	AO * A14L
Power Supply	Voltage	V	230~	
	Frequency	Hz	50	
Max Operating Current		A	10.0	12.5
Starting Current		A	4.9	5.9
*1) Wiring Spec.	Main Fuse (Circuit breaker) Current	A	20	20
	Power Cable	mm ²	4.0	
	*2) Limited wiring length	m	36	28

***1) Wiring Spec.**

Selected Sample

(Selected based on Japan Electrotechnical Standard and Codes Committee E0005)

***2) Limited Wiring length**

This is the wiring length in case voltage descent is less than 2%.

When the wiring length becomes long, please select the wiring of a more larger diameter.

10. SAFETY DEVICES

	Protection form	Model	
		AO * A12L	AO * A14L
Circuit protection	Current fuse (NEAR THE TERMINAL)	20A 250V	
		5A 250V	
	Current fuse (MAIN PRINTED CIRCUIT BOARD)	15A 250V	
		3.15A 250V	
Fan motor protection	Thermal protection program	OFF : 100 ⁺¹⁵ ₋₁₀ °C ON : 95 ⁺¹⁵ ₋₁₀ °C	
Compressor protection	Thermal protection program (COMPRESSOR TEMP.)	OFF : 110°C ON : After 40 minutes	
	Thermal protection program (DISCHARGE TEMP.)	OFF : 110°C ON : After 7 minutes	


OUTDOOR UNIT
AO*A12-14L

OUTDOOR UNIT
AO*A12-14L

REMOTE CONTROLLER

3. WIRED REMOTE CONTROLLER : UTB - *UD

FEATURES

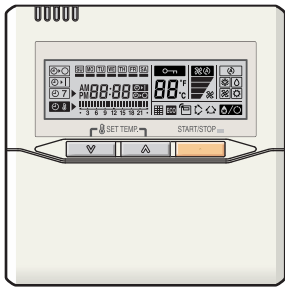

- * Various timer setup (ON / OFF / WEEKLY) are possible.
- * Equipped with weekly timer as standard function. (2 times Start / Stop per day for a week)
- * When setting up a timer, operation mode and a temperature setup can be changed.
- * When a failure occurs, the error code is displayed. (Maximum of 16)
- * Error indication. (A maximum of 16 error histories are memorizable.)
- * Up to 16 indoor units can be simultaneously controlled.
- * Economy operation are possible.
- * Easy installation with a slim shape with no bulge in the back.
- * The room temperature can be controlled by being detected the temperature accurately with built-in thermo sensor.

REMOTE CONTROLLER
UTB-*/UD

REMOTE CONTROLLER
UTB-*/UD

● Simple function setting

Setting of the air conditioner selection function is performed by remote controller.

● High performance and compact size

Three functions are combined in one unit.



● Built-in timers

Weekly timer

Possible to set ON/OFF time to operate twice each day of the week.

Easy-to-understand time bar display

Screen after setup

Setup screen example
(Set to Wednesday: 8:00 to 20:00.)


Setback timer

Possible to set temperature for two time spans and for each day of the week.

Setup screen example
(Set from Sunday to Saturday: 12:00 to 15:00, 28 °C.)

At "Weekly timer" + "Set back timer" setup


● Easy-to-understand operation

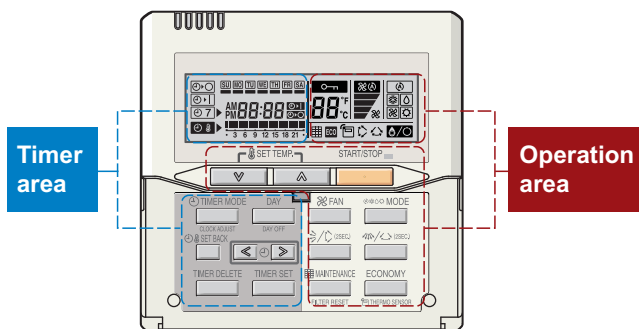


[Variable timer control]
The operation/display sections are zoned according to time and operation, enabling variable programming to match application.

● Simple installation


Components are compatible with standard switch boxes. Flat back construction allows equipment to be installed wherever it is needed.

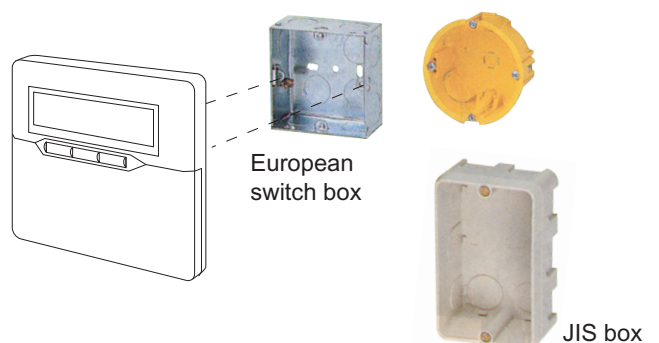

FUNCTIONS

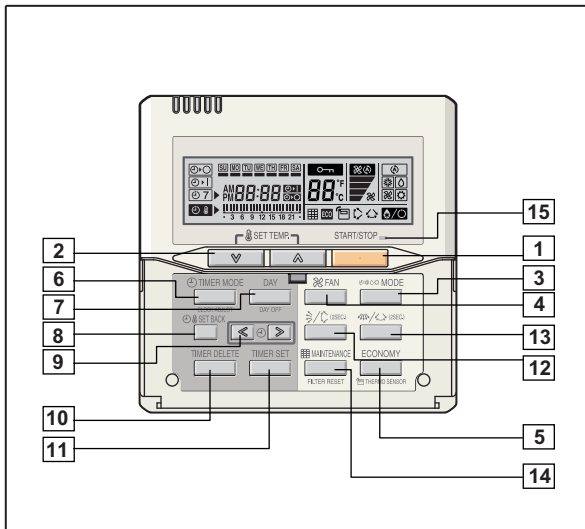


Display panel

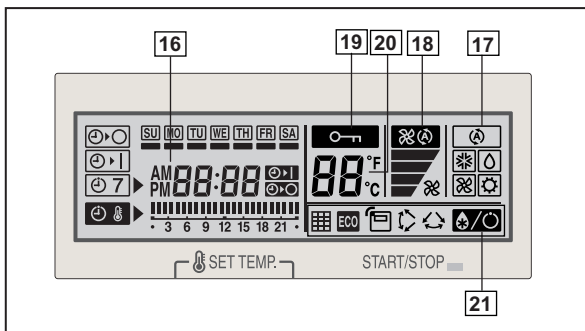

- 1 **START/STOP button**
Pressed to start and stop operation.
- 2 **Set temperature button**
Selects the setting temperature.
- 3 **Master control button**
Selects the operating mode(AUTO, HEAT, FAN, COOL, DRY).
- 4 **Fan control button**
Selects the fan speed (AUTO, QUIET, LOW, MED, HIGH).
- 5 **Economy button**
Turns the economy efficient mode on and off.
- 6 **Timer mode (CLOCK ADJUST) button**
Selects the timer mode (OFF TIMER, ON TIMER, WEEKLY TIMER)
Set the current time.
- 7 **Day (DAY OFF) button**
Temporarily cancels of one day timer.
- 8 **Set back button**
Pressed to select the set back timer.
- 9 **Set time button**
Pressed to set time.
- 10 **Delete button**
The schedule of a weekly timer is deleted.
- 11 **Set button**
Sets the date, hour, minute and on-off time.
- 12 **Vertical airflow direction and swing button**
Push for two seconds to change the swing mode.
- 13 **Horizontal airflow direction and swing button**
Push for two seconds to change the swing mode.
- 14 **Filter button**
- 15 **Operation lamp**
Lights during operation and when the timer is on.
- 16 **Timer and clock display**
- 17 **Operation mode display**
- 18 **Fan speed display**
- 19 **Operation lock display**
- 20 **Temperature display**
- 21 **Function display**
 - Defrost display
 - Thermo sensor display
 - Economy display
 - Vertical swing display
 - Horizontal swing display
 - Filter display

DIMENSION

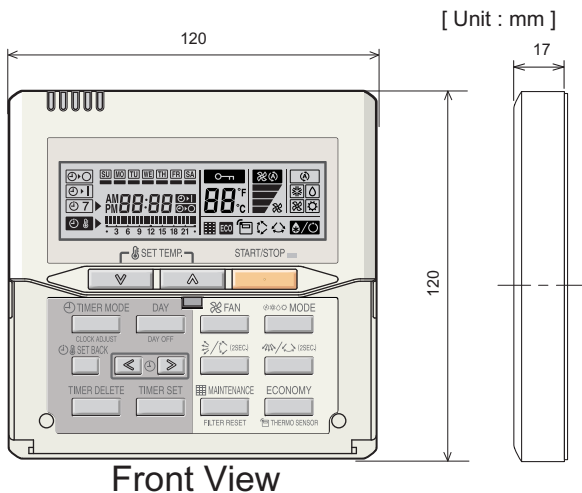

SPECIFICATION

SIZE (H x W x D mm)	120 x 120 x 17
WEIGHT (g)	160
CABLE LENGTH (m)	10
POWER (V)	12

REMOTE CONTROLLER

4. WIRELESS REMOTE CONTROLLER :

UTB - *NA

FEATURES



- * Four kinds of timer setup (ON / OFF / PROGRAM / SLEEP) are possible.
- * Four kinds of timers. Easy operation.
- * Easy to change transmission code (4 patterns) by button operation.

● Simple function setting

Setting of the air conditioner selection function is performed by remote controller.

● Built-in timers

Select from four different timer programs (On/Off/Program/Sleep).

● Program timer


The program timer operates the ON and OFF timer once within a 24 hour period.

● Sleep timer

The sleep timer function automatically corrects the temperature thermostat setting according to the time setting to prevent excessive cooling and heating while sleeping.


Cooling operation/dry operation

When the sleep timer is set, the set temperature automatically rises 1°C every hour. The set temperature can rise up to a maximum of 2°C.


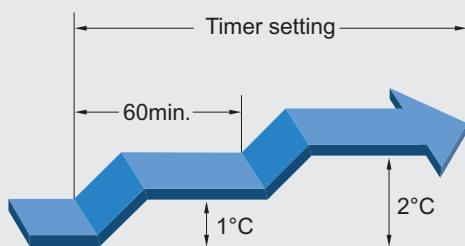


Heating operation


When the sleep timer is set, the set temperature automatically drops 1°C every 30 minutes. The set temperature can drop to a maximum of 4°C.

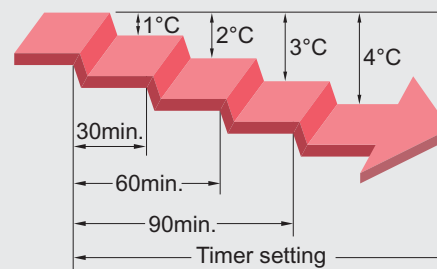

● Simultaneously operation




- Code selector switch eliminates unit being wrongly switched. (Up to 4 codes can be set.)




- Wide and precise transmitting range.

1. Press the MODE button for more than five seconds to start the code change.
2. Press the ▲ or ▼ button to select the desired code.
▶ A → B → C → D
3. Press the MODE button again to end the code change.




FUNCTIONS

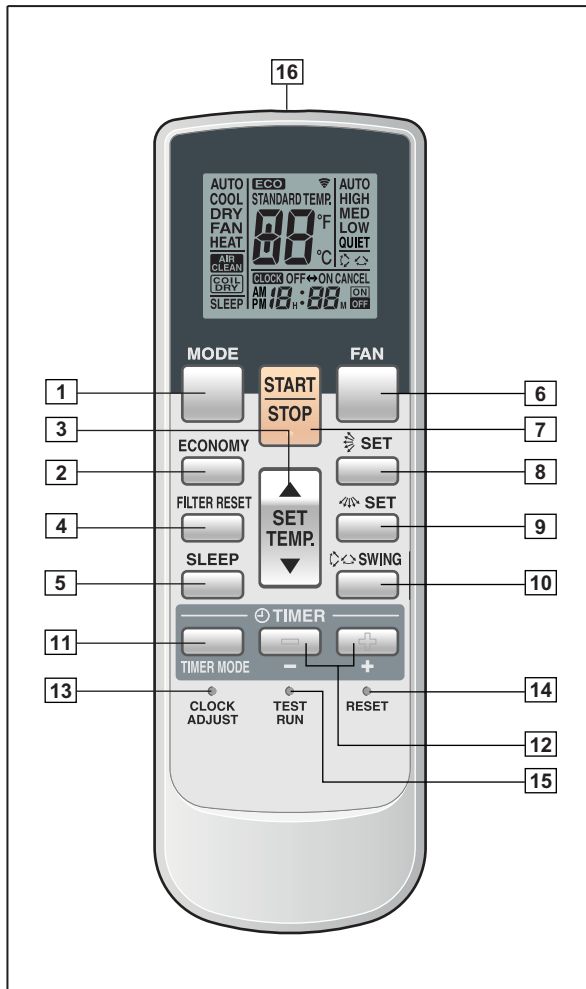

- 1 **MODE button**
Selects the operating mode (AUTO, HEAT, FAN, COOL, DRY).
/Start / end R.C. custom code change. (Max 4 types)
- 2 **Economy button**
- 3 **Set temp. button (▲/▼)**
Set remote controller custom code buttons
Sets the indoor temp./ Sets R.C. custom code.
- 4 **Filter reset button**
- 5 **Sleep button**
Pressed to select sleep timer.
- 6 **Fan button**
Selects the fan speed (AUTO, QUIET, LOW, MED, HIGH).
- 7 **START/STOP button**
Pressed to start and stop operation.
- 8 **Set button (Vertical)**
Air flow direction vertical set button.
- 9 **Set button (Horizontal)**
Air flow direction horizontal set button.
- 10 **Swing button**
Air flow direction swing button.
- 11 **Timer mode button**
Pressed to select the timer mode. (OFF TIMER, ON TIMER, PROGRAM TIMER, TIMER RESET)
- 12 **Timer set (+/-) button**
Sets the current time and on-off time.
- 13 **Clock adjust button**
Sets the current time.
- 14 **Reset button**
Used when replacing batteries.
- 15 **Test run button**
Used when testing the air conditioner after installation.

Display panel

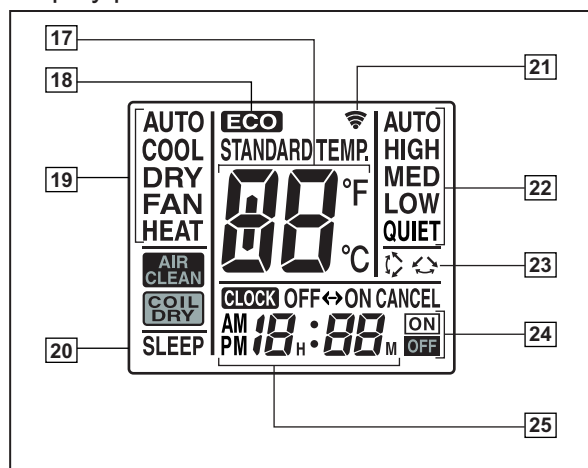

- 16 **Signal transmitter**
- 17 **Temperature set display**
- 18 **Economy display**
- 19 **Operating mode display**
- 20 **Sleep display**
- 21 **Transmit indicator**
- 22 **Fan speed display**
- 23 **Swing display**
- 24 **Timer mode display**
- 25 **Clock display**

SPECIFICATION

SIZE (H x W x D mm)	170 x 56 x 19
WEIGHT (g)	80
ACCESSORY	Holder