

Wall mounted unit Air Conditioning Technical Data FAA-B



FAA71BUV1B
FAA100BUV1B

TABLE OF CONTENTS

FAA-B

1	Features	4
	FAA-B	4
2	Specifications	5
3	Safety device settings	6
4	Options	7
5	Dimensional drawings	8
6	Centre of gravity	9
7	Piping diagrams	10
8	Wiring diagrams	11
	Wiring Diagrams - Three Phase	11
9	Sound data	12
	Sound Power Spectrum	12
	Sound Pressure Spectrum	13
10	Air flow patterns	14
	Air flow pattern - Cooling and Heating	14

1 Features

1 - 1 FAA-B

For rooms with no false ceilings nor free floor space

1

- › Flat, stylish front panel blends easily within any interior décor and is easier to clean
- › Can easily be installed in both new and refurbishment projects
- › Unified indoor unit range for R-32 and R-410A
- › Combining with R-32 Bluevolution technology, reduces environmental impact with 68% compared to R-410A, leads directly to lower energy consumption thanks to its high energy efficiency and has up to lower 16% refrigerant charge
- › The air is comfortably spread up- and downwards thanks to 5 different discharge angles that can be programmed via the remote control
- › Maintenance operations can be performed easily from the front of the unit
- › Flexible to install as the largest casing only weighs 17kg and piping connection can be done at the bottom, left or right of the unit



Infrastructure cooling



Onecta app (optional)
(optional)



Home leave operation



Fan only



Auto cooling-heating changeover



Vertical auto swing



Fan speed steps (3 steps)



Dry programme



Air filter



Weekly timer



Infrared remote control (optional)



Wired remote control (optional)



Centralised control



Auto-restart



Self diagnosis



Drain pump kit (optional)



Twin/triple/double twin application



2 Specifications

1 - 1 FAA-B

Technical specifications					FAA71B	FAA100B
Power input - 50Hz	Cooling	Nom.	kW		0.037 (1)	0.06
	Heating	Nom.	kW		0.039 (2)	0.06
Casing	Colour				White	
	Material				Resin	
Dimensions	Unit	Height	mm		290	340
		Width	mm		1,050	1,200
		Depth	mm		269	262
	Packed unit	Height	mm		368	337
		Width	mm		1,138	1,310
		Depth	mm		380	429
Weight	Unit	kg		14.0	18	
	Packed unit	kg		18	23	
Heat exchanger	Fin	Type	Cross fin coil (Multi slit fins and Hi-XB tubes)			
Fan	Type					Cross flow fan
	Quantity					1
	Air flow rate	Cooling	High	m³/min	16.2	23.0
				cfm	571	811
			Medium	m³/min	13.4	21.1
				cfm	473	745
			Low	m³/min	12.1	18.7
				cfm	427	659
		Heating	High	m³/min	16.9	23.0
				cfm	598	811
			Medium	m³/min	14.2	20.9
				cfm	500	738
			Low	m³/min	12.7	18.7
				cfm	448	659
Fan motor	Speed	Steps	3			
		Cooling	High	rpm	1,379	1,360
			Low	rpm	1,113	1,150
		Heating	High	rpm	1,431	1,360
			Low	rpm	1,155	1,150
		Output	High	W	48	-
	Phase x Voltage		V	DC310	DC325	
	Full load amps (FLA)	Cooling	A	0.3	0.5	
		Heating	A	0.4	0.5	
	Sound power level	Cooling				61.0
Heating					61.0	65.0
Sound pressure level	Cooling	High	dB(A)	45.0	49.0	
		Medium	dB(A)	42.0	45.0	
		Low	dB(A)	40.0	41.0	
	Heating	High	dB(A)	45.0	49.0	
		Medium	dB(A)	42.0	45.0	
		Low	dB(A)	40.0	41.0	
Refrigerant	Type	R32/R410A				
Piping connections	Liquid	Type	Flare connection			
		OD	mm	9.52		
	Gas	Type	Flare connection			
		OD	mm	15.9	15.90	
	Drain	VP13 (I.D. 13/O.D. 18)				
	Heat insulation		Foamed polystyrene/polyethylene			
Fan motor	Speed	Cooling	Medium	rpm	1,206	1,270
		Heating	Medium	rpm	1,252	1,260

Standard accessories: Installation and operation manual; Quantity: 1;

Standard accessories: Installation plate; Quantity: 1;

Standard accessories: Screw bag; Quantity: 1;

Standard accessories: Wire clamp material; Quantity: 4;

Standard accessories: Heat insulating tape; Quantity: 1;

Standard accessories: General safety precautions; Quantity: 1;

Standard accessories: Screw cover; Quantity: 3;

Electrical specifications					FAA71B	FAA100B
Power supply	Phase				1~	
	Frequency		Hz		50	
	Voltage		V		220-240	

(1)Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. |

(2)Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. |

The sound power level is an absolute value indicating the power which a sound source generates. |

Instead of a fuse, use a circuit breaker |

Select wire size based on the value of MCA |

Contains fluorinated greenhouse gases

3 Safety device settings

3 - 1 Safety Device Settings

FAA-B

3

Safety devices		Class	
		71	100
FAA~BUV1B	Fan motor fuse (on wire)	250V, 3.15A	250V, 3.15A

4D134738

4 Options

4 - 1 Options

FAA-B

Option kit		Product name	Compatibility	
			FAA71BUV1B	FAA100BUV1B
Wireless remote control	Heat pump	BRC7EA631	✓	×
		BRC7EA632	×	✓
Wired remote control		BRC1E53A7 (*1) / BRC1E53B7 (*2) / BRC1E53C7 (*3)	✓	✓
		BRC1H519W7/K7/S7	✓	✓
		BRC1H81W7/S7	✓	✓
		BRC1D528	✓	✓
		BRC1H52W/S/K	✓	✓
		BRC1H82W/S/K	✓	✓
		BRC2E52C7	✓	✓
Simplified remote control (with operation mode selector button)		BRC3E52C7	✓	✓
Simplified remote control (without operation mode selector button)		BRC3E52C7	✓	✓
Wiring adaptor for electrical appendices		KRP4A51 (*4)	✓	✓
Installation box for adaptor PCB		KRP4B93	✓	✓
Central remote control		DCS302C51	✓	✓
Electrical box with earth terminal (-3: blocks)		KJB311A	✓	✓
Electrical box with earth terminal (-2: blocks)		KJB212A	✓	✓
Unified ON/OFF controller		DCS301B51	✓	✓
Schedule timer		DST301B51	✓	✓
Remote sensor		KRCS01-4B	✓	✓
Drain pump kit		K-KDU572KVE	✓	✓
iTouch Controller		DCS601C51	✓	✓
Digital input adaptor		BRP7A51 (*4)(*5)	✓	✓
WLAN adaptor for smartphones		BRP069C81 (*6)	✓	✓
Intelligent Touch Manager		DCM601A51	✓	✓
Intelligent Tablet Controller		DCC601A51	✓	✓

Notes

(*1) Included languages are: English, German, French, Italian, Spanish, Portuguese, and Dutch.

(*2) Included languages are: English, Czech, Croatian, Hungarian, Slovenian, Romanian, and Bulgarian.

(*3) Included languages are: English, Russian, Greek, Turkish, Polish, Albanian, and Slovak.

(*4) This option needs to be installed together with installation box ·KRP4B93·.

(*5) Only possible in combination with remote control ·BRC1E* / BRC2E* / BRC3E* / BRC1H* / BRC1D*·.


(*6) Only possible in combination with wired or wireless remote control (e.g. ·BRC1H*·)

4D134780

5 Dimensional drawings


5 - 1 Dimensional Drawings

FAA71B

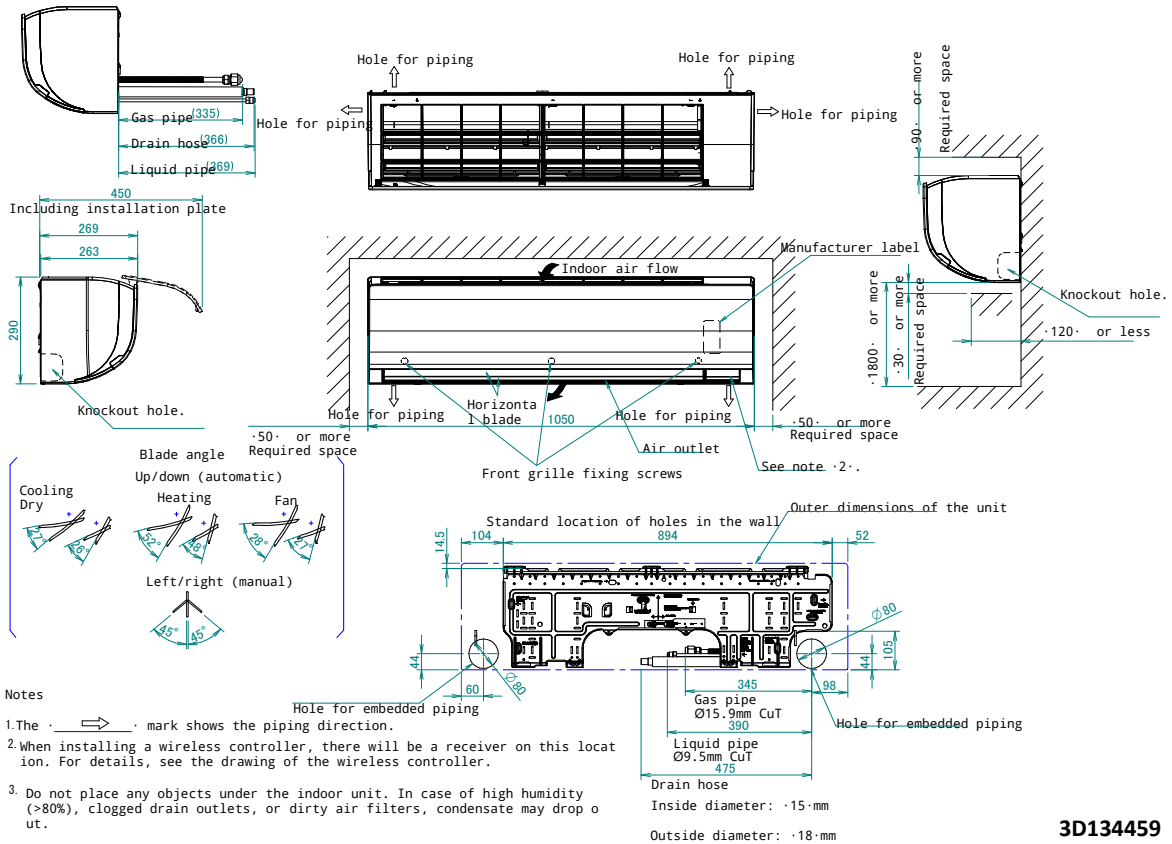

3D134459

FAA100B

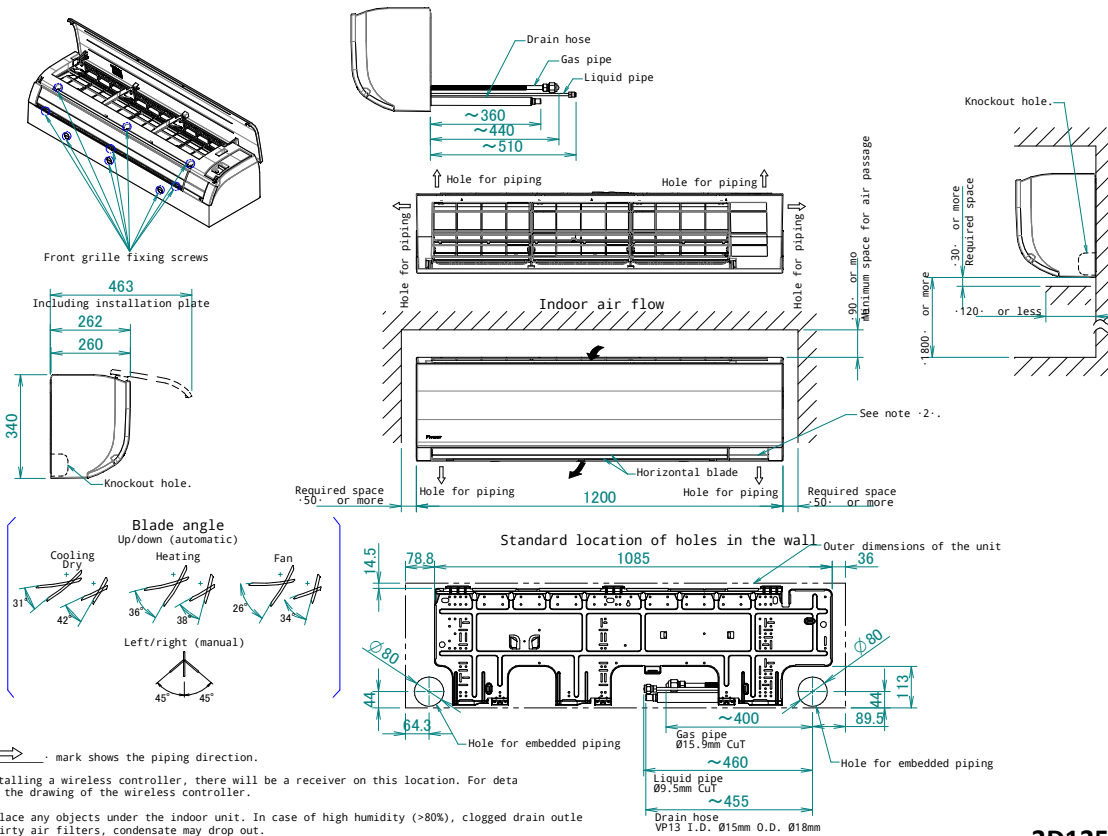


3D135741

6 Centre of gravity


6 - 1 Centre of Gravity

FAA71B

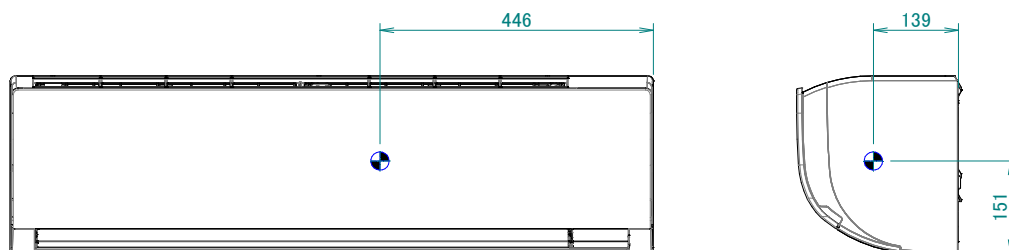

3D134737

FAA100B

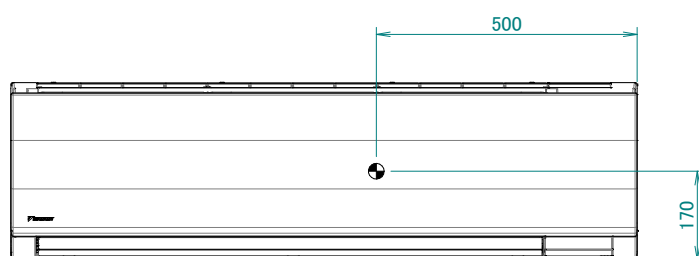

3D135760

7 Piping diagrams


7 - 1 Piping Diagrams

FAA-A

FAA-B

7

Indoor unit

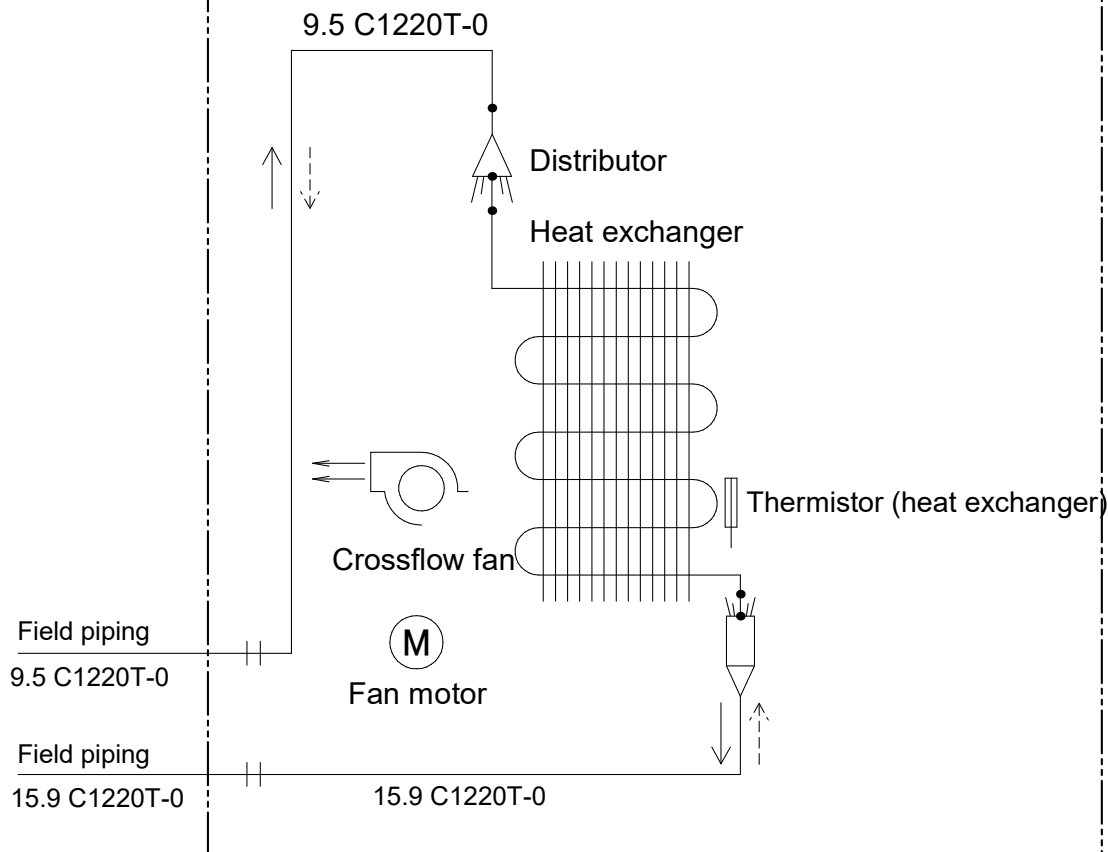

Refrigerant flow

→ Cooling

---→ Heating

Applicable models

FAA71/FAA100


4D107908

8 Wiring diagrams

8 - 1 Wiring Diagrams - Three Phase

FAA-B

Indoor unit	
A1P	Printed circuit board
C105	Capacitor (M1F)
F1U	Fuse 3.15A
HAP	Flashing lamp (service monitor green)
K2R	Magnetic relay
M1F	Motor (indoor fan)
M1S	Motor (swing flap)
M2S	Motor (swing flap)
R1T	Thermistor (air)
R2T-R3T	Thermistor (coil)
SS1	Selector switch (emergency)
V1R	Diode bridge
X1M	Terminal block (remote controller)
X2M	Terminal block (transmission wiring)
Z1C	Ferrite core (noise filter)
Z1F	Noise filter
PS	Switching power supply
RC	Signal receiver circuit
TC	Signal transmission circuit
Wireless remote controller (Receiver/display unit)	
A2P	Printed circuit board
A3P	Printed circuit board
BS1	Push button (on/off)
H1P	Pilot lamp (on-red)
H2P	Pilot lamp (timer-green)
H3P	Pilot lamp (filter sign-red)
H4P	Pilot lamp (defrost-orange)
SS1	Selector switch (main/sub)
SS2	Selector switch (wireless address set)
Wired remote controller	
R1T	Thermistor (air)
Connector for optional parts	
X15A	Connector (float switch)
X24A	Connector (wireless remote controller)
X35A	Connector (power supply for adapter)
X50A	Connector (Wireless adapter)

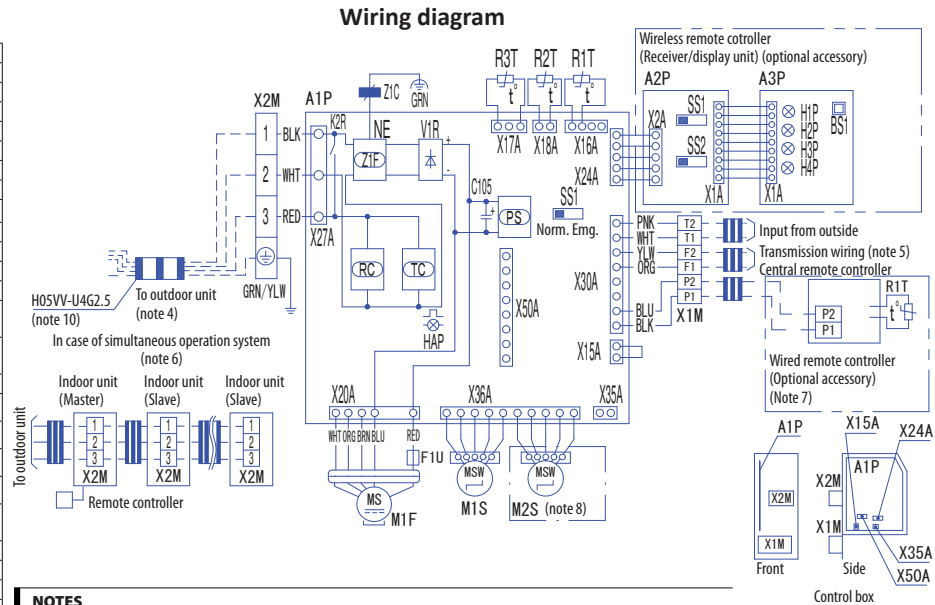

NOTES

1. : Terminal block, : Connector, : Short circuit connector
2. : Field wiring
3. In case of simultaneous operation indoor unit system, see the indoor unit wiring only.
4. For the detail, see wiring diagram attached to outdoor unit.
5. In case of using central remote controller, connect it to the unit in accordance with the attached installation manual.
6. In case of connection units varies according to the combination system, confirm engineering guide and catalogs, etc, before connecting.
7. In case of main/sub changeover, see the installation manual attached to remote controller.
8. M2S is for 100 class only.
9. Symbols shows as follows: BLK: black, RED: red, BLU: blue, WHT: white, PNK: pink, YLW: yellow, GRY: grey, GRN: green, ORG: orange, BRN: brown
10. Shows only in case of protected pipes. Use H07RN-F in case of no protection.


3D134261

9 Sound data

9 - 1 Sound Power Spectrum


9

FAA71B

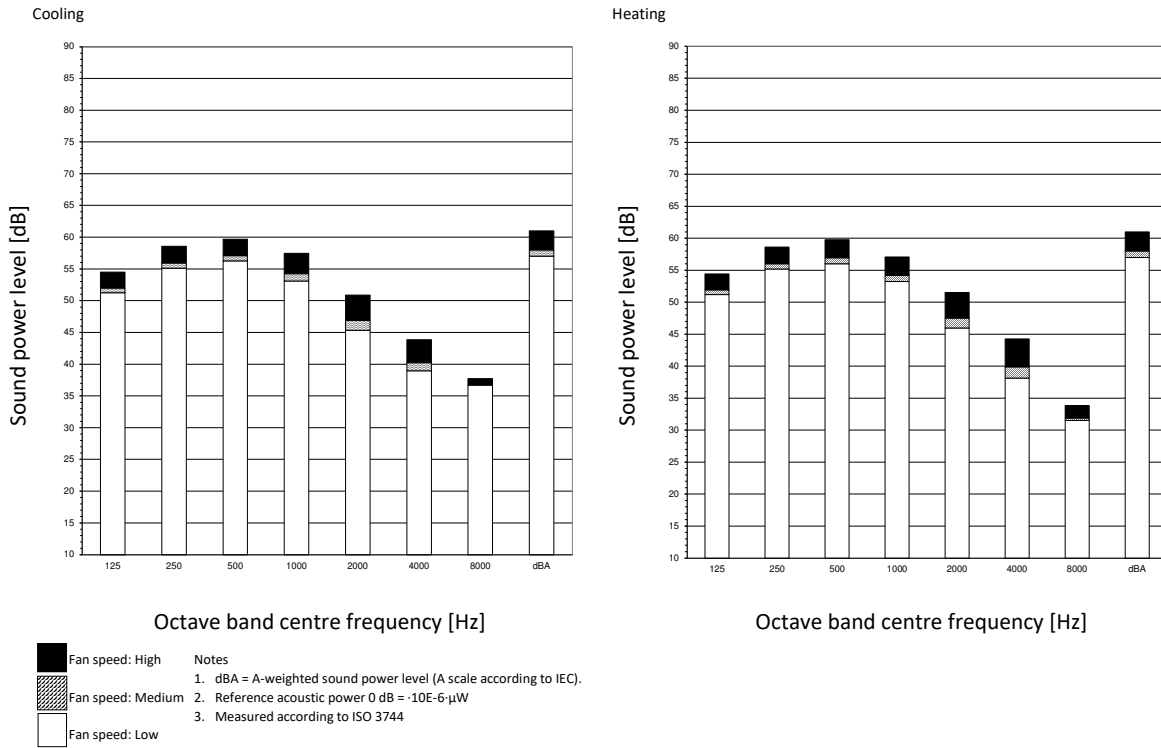

3D138074

FAA100B

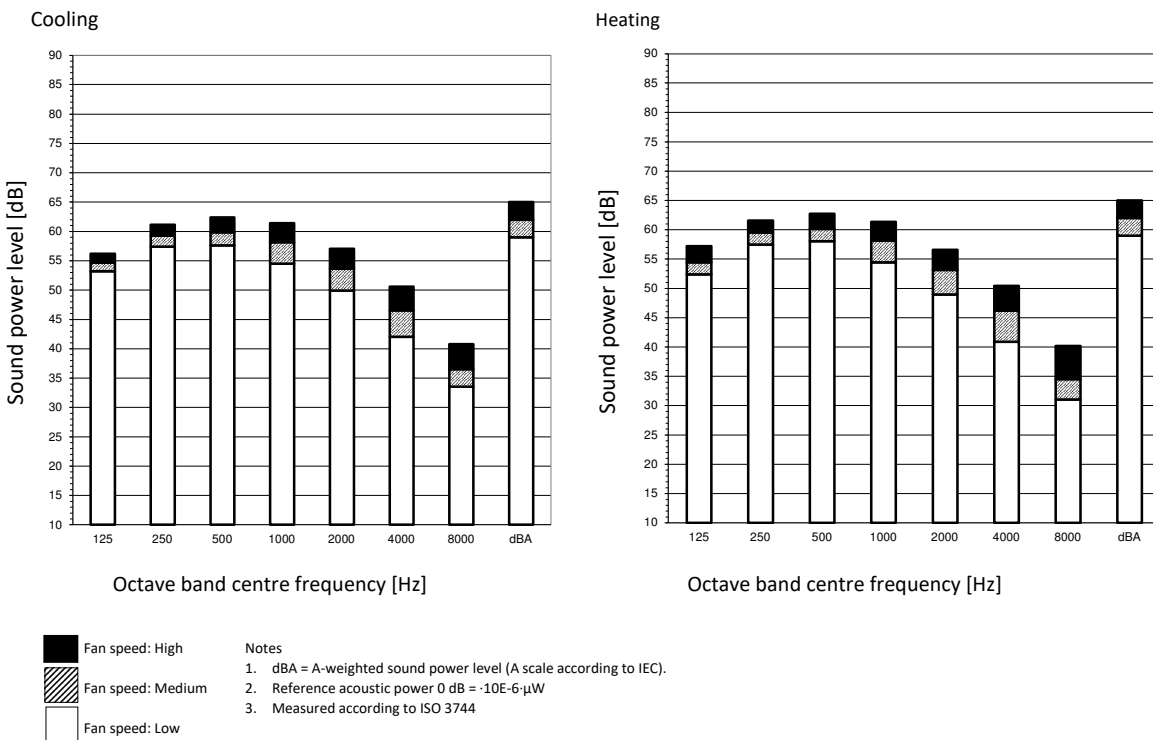


3D138075

9 Sound data


9 - 2 Sound Pressure Spectrum

FAA71B

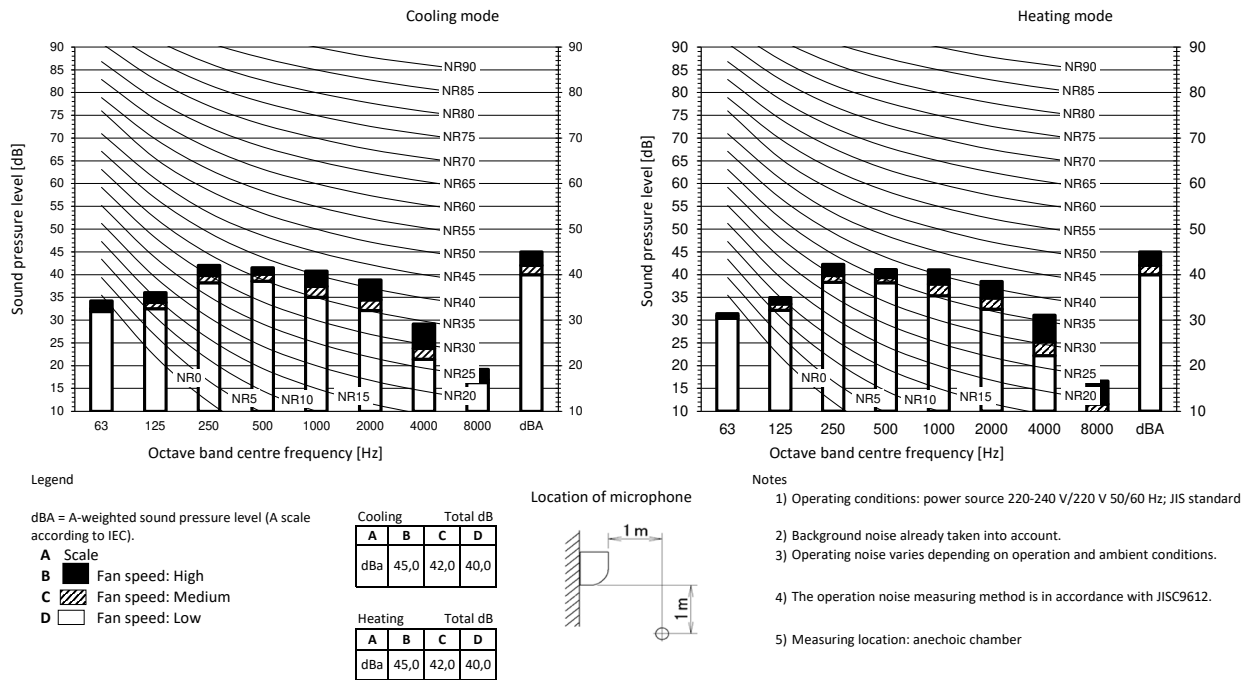

4D134959

FAA100B

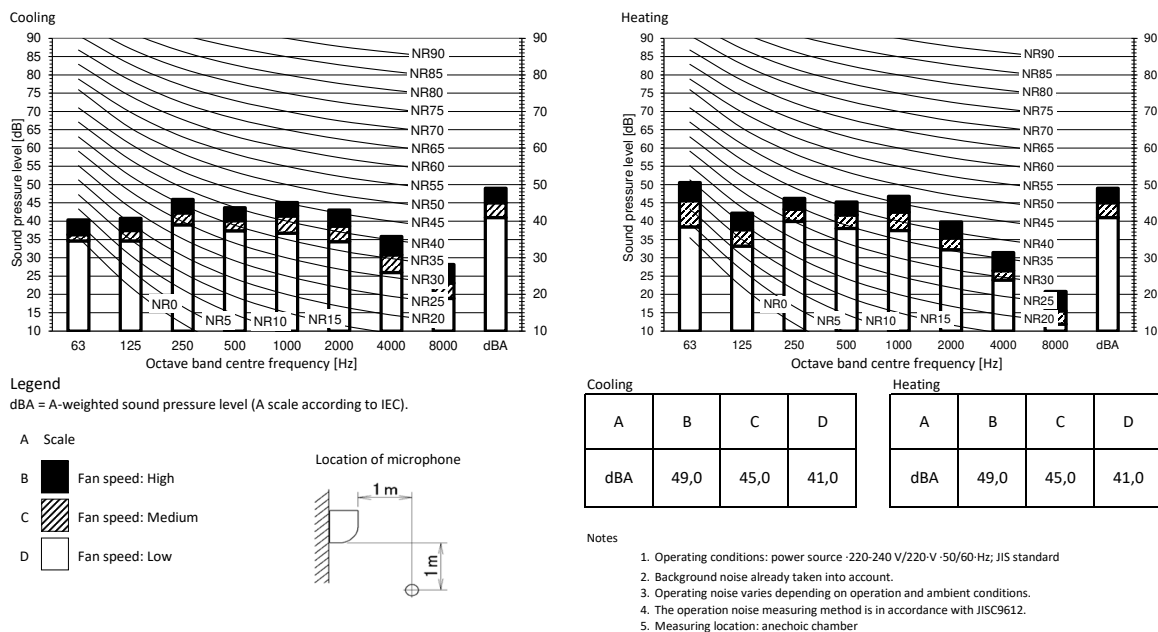

4D137498


10 Air flow patterns

10 - 1 Air flow pattern - Cooling and Heating


10

FAA71B


Air velocity distribution (cooling)
Air flow direction: horizontal

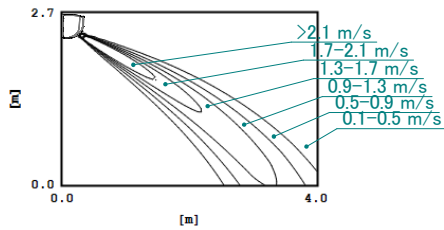


Air temperature distribution (cooling)
Air flow direction: horizontal

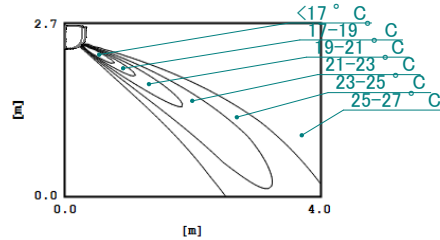

Air velocity distribution (heating)
Air flow direction: vertical

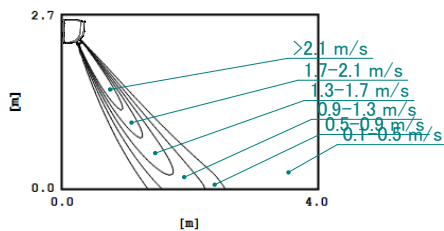


Air temperature distribution (heating)
Air flow direction: vertical

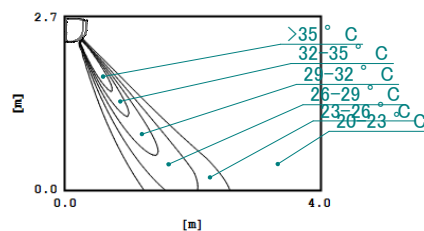


3D137553

FAA100B


Air velocity distribution (cooling)
Air flow direction: horizontal

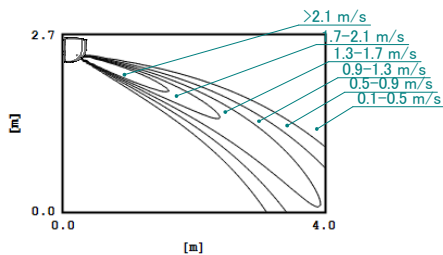


Air temperature distribution (cooling)
Air flow direction: horizontal

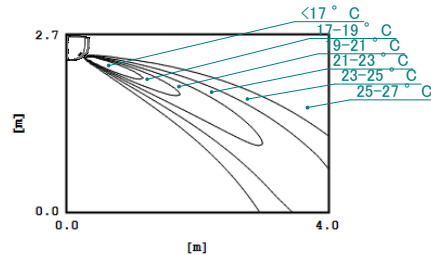


Air velocity distribution (heating)
Air flow direction: vertical

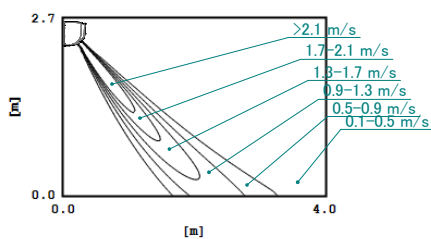

Air temperature distribution (heating)
Air flow direction: vertical

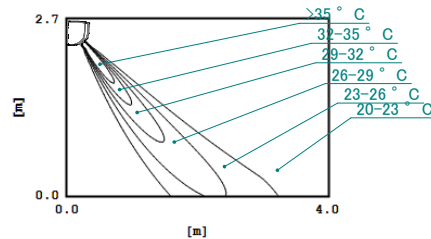

3D137557



EEDEN21 A

12/2021



The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. / Daikin Central Europe HandelsGmbH. Daikin Europe N.V. / Daikin Central Europe HandelsGmbH have compiled the content of this publication to the best of their knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. / Daikin Central Europe HandelsGmbH explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V.