


AIR CONDITIONING

Medium Static Pressure Duct

ARXG12KHTAP / AOYG12KBTB
ARXG14KHTAP / AOYG14KBTB
ARXG18KHTAP / AOYG18KBTB
ARXG22KHTAP / AOYG22KBTB
ARXG24KHTAP / AOYG24KBTB


ARXG30KHTAP / AOYG30KBTB
ARXG36KHTAP / AOYG36KBTB
ARXG45KHTAP / AOYG45KBTB
ARXG54KHTAP / AOYG54KBTB



ARXG12/14KHTAP



ARXG18/22/24/30KHTAP



ARXG36/45/54KHTAP




High efficiency and quiet operation

The combination of the V-shaped heat exchanger, air stabiliser, and the high efficient DC fan motor allowed high efficiency and quiet operation.

Rank Cooling **A++**
Heating **A+**

SEER **6.50**
(18/22/24 models)

SCOP **4.20**
(22/36 models)

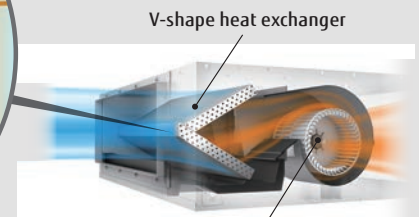


High efficient DC fan motor
Lower power consumption
Max 200pa




Automatic airflow adjustment function

This unique and innovative function detects required air flow in each application case and automatically adjust the volume.

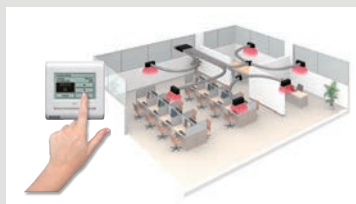

Low ambient operation

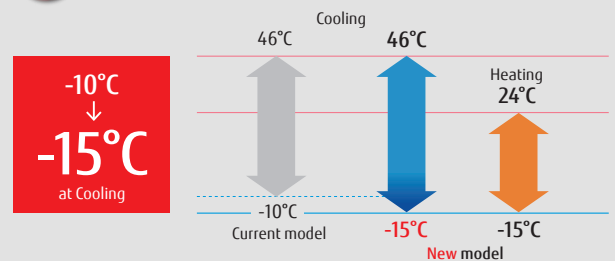

Small and light weight outdoor unit

This model is much more compact than conventional outdoor unit. It can be installed in a smaller place.



Model: ARXG12KHTAP / ARXG14KHTAP / ARXG18KHTAP / ARXG22KHTAP / ARXG24KHTAP / ARXG30KHTAP / ARXG36KHTAP / ARXG45KHTAP / ARXG54KHTAP
 AOYG12KBTB / AOYG14KBTB / AOYG18KBTB / AOYG22KBTB / AOYG24KBTB / AOYG30KBTB / AOYG36KBTB / AOYG45KBTB / AOYG54KBTB



Optional parts

Wired Remote Controller: UTY-RNRYZ3, UTY-RVNYM	IR Receiver Kit: UTY-LBTYM	Long Life Filter: UTD-LFNA (ARXG36/45/54KHTAP)
Simple Remote Controller: UTY-RSRY, UTY-RSNYM	Wireless LAN Interface: UTY-TFSXZ1	UTD-LFNB (ARXG18/24/30KHTAP)
External Input and Output PCB Box: UTZ-GXRA	Remote Sensor Unit: UTY-XSZX	UTD-LFNC (ARXG12/14KHTAP)
External Input and Output PCB (with bracket): UTY-XCSX + UTZ-GXNA	External Connect Kit: UTY-XWZXZG	

Dimensions

Indoor unit :
ARXG12/14/18/22/24/30/36/45/54KHTAP

Outdoor unit :
AOYG12/14KBTB

AOYG18/22KBTB

AOYG24KBTB

AOYG30/36KBTB

AOYG45/54KBTB

(Unit : mm)

	ARXG12/14KHTAP	ARXG18/22/24/30KHTAP	ARXG36/45/54KHTAP
A	700	1,000	1,400
B	462	762	1,162
C	650	895	1,295
D	740	1,040	1,440

Model No.	Indoor unit		ARXG12KHTAP	ARXG14KHTAP	ARXG18KHTAP	ARXG22KHTAP	ARXG24KHTAP	ARXG30KHTAP	ARXG36KHTAP	ARXG45KHTAP	ARXG54KHTAP
	Outdoor unit		AOYG12KBTB	AOYG14KBTB	AOYG18KBTB	AOYG22KBTB	AOYG24KBTB	AOYG30KBTB	AOYG36KBTB	AOYG45KBTB	AOYG54KBTB
Power Source			Single-phase, ~230V, 50Hz								
Capacity	Cooling	kW	3.5 (0.9-4.4)	4.3 (0.9-5.4)	5.2 (0.9-5.9)	6.0 (0.9-6.7)	6.8 (0.9-8.0)	8.5 (2.8-10.0)	9.5 (2.8-11.2)	12.1 (4.0-14.0)	13.4 (4.5-14.5)
	Heating		4.1 (0.9-5.7)	5.0 (0.9-6.5)	6.0 (0.9-7.5)	7.0 (0.9-8.0)	7.5 (0.9-9.1)	10.0 (2.7-11.2)	10.8 (2.7-12.7)	13.5 (4.2-16.2)	15.5 (4.7-16.5)
UK Total/sensible cooling			3.39/2.96	4.12/3.53	5.01/4.09	5.85/4.75	6.63/5.13	8.08/6.39	9.03/7.5	11.54/9.52	12.78/10.4
Input Power	Cooling/Heating	kW	0.87/1.00	1.17/1.25	1.36/1.56	1.71/1.81	1.89/1.85	2.65/2.63	2.86/2.48	3.53/3.37	4.42/3.89
EER	Cooling	W/W	4.02	3.68	3.82	3.51	3.60	3.21	3.32	3.43	3.03
COP	Heating		4.10	4.00	3.85	3.87	4.06	3.80	4.35	4.01	3.98
Pdesign	Cooling/Heating(-10°C)	kW	3.5/3.4	4.3/3.8	5.2/4.4	6.0/4.8	6.8/6.0	8.5/8.0	9.5/8.7	-	-
SEER	Cooling	W/W	6.30	6.20	6.50	6.50	6.50	6.23	6.10	-	-
SCOP	Heating (Average)		4.10	4.00	4.10	4.20	4.10	4.00	4.20	-	-
Energy Efficiency Class	Cooling	A++		A++	A++	A++	A++	A++	A++	-	-
	Heating (Average)	A+		A+	A+	A+	A+	A+	A+	-	-
Annual Energy Consumption	Cooling	kWh/a	194	243	280	323	366	477	544	-	-
	Heating		1,159	1,328	1,501	1,597	2,048	2,796	2,898	-	-
Moisture Removal			0.7	0.9	1.2	1.5	1.8	2.3	2.0	2.6	3.7
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	32/27/26/24	33/28/27/25	28/25/22/20	28/25/22/20	32/28/24/21	36/33/30/29	36/31/28/26	39/35/31/29	39/35/31/29
	Indoor (Heating)	H/M/L/Q	32/27/26/24	33/28/27/25	28/25/22/20	28/25/22/20	32/28/24/21	36/33/30/29	33/31/28/26	39/35/31/29	39/35/31/29
Sound Power Level	Outdoor (Cooling/Heating)	High	47/47	49/49	50/50	51/51	53/54	53/55	55/55	57/57	57/59
	Indoor (Cooling/Heating)	High	57/58	59/60	54/54	57/57	57/57	63/65	64/63	67/69	67/69
Airflow Rate	Indoor / Outdoor (Cooling)	High	850/1,580	950/1,670	1,050/2,160	1,050/2,240	1,360/2,700	1,700/3,750	2,050/3,750	2,550/4,450	2,550/4,450
	Indoor / Outdoor (Heating)	High	850/1,520	950/1,580	1,050/1,830	1,050/1,960	1,360/2,700	1,700/3,750	2,050/3,750	2,550/4,450	2,550/4,450
Static pressure range (Standard)			Pa	30 to 200 (35)	30 to 200 (35)	30 to 200 (35)	30 to 200 (35)	30 to 200 (35)	30 to 200 (47)	30 to 200 (47)	30 to 200 (60)
Net Dimensions H x W x D	Indoor	mm	300x700x700	300x700x700	300x1,000x700	300x1,000x700	300x1,000x700	300x1,000x700	300x1,000x700	300x1,400x700	300x1,400x700
	Outdoor	mm	542x799x290	542x799x290	632x799x290	632x799x290	716x820x315	788x940x320	788x940x320	998x940x320	998x940x320
Weight	Indoor	kg(lbs)	27 (60)	27 (60)	35 (77)	35 (77)	36 (79)	36 (79)	46 (101)	46 (101)	46 (101)
	Outdoor	kg(lbs)	33 (73)	33 (73)	36 (79)	38 (84)	42 (93)	52 (115)	52 (115)	67 (148)	67 (148)
Remote Controller Type (NOT Supplied With Unit)			NO CONTROLLER SUPPLIED WITH THESE UNITS PLEASE ORDER SEPARATELY								
Interconnecting Cable (Suggested cable size 1.5mm)			3 Core + Earth								
Suggested MCB Size			Amp	10	16	16	16	16	25	25	30
Max. Operating Current	Cooling/Heating	A	9.7	10.2	12.1	12.6	13.6	22.6	22.6	28.5	28.5
Power Supply To			Outdoor								
Connection Pipe Diameter (Gas / Liquid)	Inch		3/8 & 1/4	3/8 & 1/4	1/2 & 1/4	1/2 & 1/4	1/2 & 1/4	5/8 & 3/8	5/8 & 3/8	5/8 & 3/8	5/8 & 3/8
Max Pipe Length (Pre-Charge)	m		25 (15)	25 (15)	30 (20)	30 (20)	30 (20)	50 (30)	50 (30)	50 (30)	50 (30)
Max Height Difference	m		20	20	20	25	25	30	30	30	30
Operation Range	Cooling	°CDB	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46
	Heating	°CDB	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24
Refrigerant	Type		R32	R32	R32	R32	R32	R32	R32	R32	R32
	Charge	g	850	850	1020	1250	1250	1900	1900	2700	2700
	Additional Charge	g/m	20	20	20	20	20	40	40	40	40
Filter (To be ordered separately)			UTD-LFNC	UTD-LFNC	UTD-LFNB	UTD-LFNB	UTD-LFNB	UTD-LFNB	UTD-LFNA	UTD-LFNA	UTD-LFNA

*Specifications and design are subject to change without notice for further improvement.
 *Actual products' colours may be different from the colours shown in this printed material.

Distributed by :



ISO 9001 Certified number: 01 180 075229
 ISO 14001 Certified number: 01 184 9245
 Fujitsu General (Thailand) Co., Ltd.

ISO 9001 Certified number: 159172007/285M
 ISO 14001 Certified number: 1591822001/815M
 Fujitsu General Central Air-conditioner(Wuxi) Co., Ltd.

FUJITSU GENERAL AIR CONDITIONING (UK) LTD

Unit 150 Centennial Park, Centennial Avenue, Elstree, Herts. WD6 3SG

www.fujitsu-general.com/uk

Tel: +44 (0)208 731 3450 Fax: +44 (0)208 731 3451