

# Hydro Free High-Temperature

Heating mode only



## For a variety of applications

- High-temperature heating: combined with the VRF Sigma or SET FREE Mini 2/3-pipe.
- Constant DHW production: combined with the VRF Sigma or 3-pipe SET FREE Mini.
- Timed DHW production: combined with the VRF Sigma or 3-pipe SET FREE Mini.


The Hydro Free high-temperature system is ideal for high-temperature hot water needs for renovation projects, as heat is recovered via the CH box on indoor units operating in cooling mode.

## 2-in-1 system


A single unit to meet 2 needs: **heating and DHW**. The High-Temperature Hydro Free system produces hot water up to 80°C from renewable energy (no anti-legionella cycle required).

## Smart operation


High-Temperature Hydro Free models are equipped with 2 compressors operating on a smart cascading system, and 2 refrigeration cycles (R-410A and R-134A): the second cycle occurs only if the inlet temperature is greater than or equal to 30°C or when the outlet temperature is greater than or equal to 45°C.

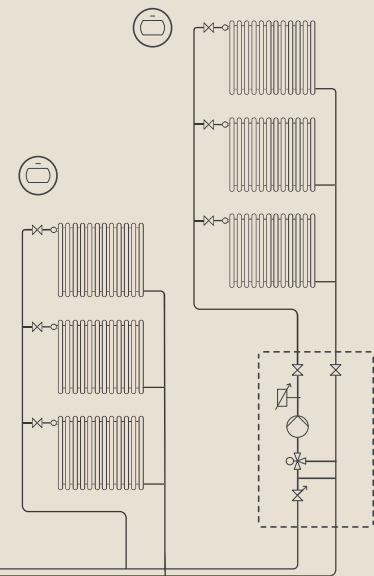

Setup example with 3-pipe system

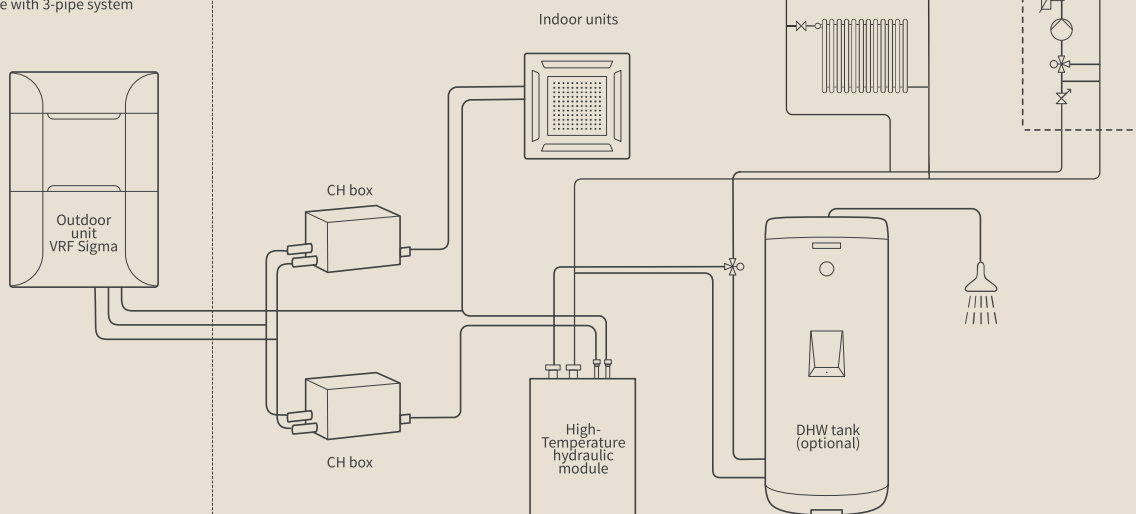

## Indoor units



RWHT-5.0VNF1E

# Hydro Free High-Temperature

Indoor units		Unit	RWHT-5.0VNF1E
Rated power Heating (7°C outside / 35°C water)		kW	16
Heating capacity (-7°C outside / 65°C water)		kW	13.9
Heating capacity (-7°C outside / 80°C water)		kW	12.4
Sound power		dB(A)	57
Net weight		kg	129
Unit dimensions	Height (with connections)	mm	751(802)
	Width	mm	600
	Depth	mm	623
Water flow	Nominal	m³/h	2.8
Min. system water capacity		L	80
Power supply		-	1~ 230V 50Hz
Max. consumption		kW	6.23
Refrigeration connection type		-	Flare nut
Diameter of pipes (Liq - Gas)		inches	3/8" - 5/8"
Hydraulic connections (male/male valves supplied)		inches	1-1/4" - 1-1/4"
Refrigerant		-	R134A
Compressor		-	Scroll
Hydro free connection rate		-	0 ~ 100%
Total ratio of DX when installed with Hydro free*		-	50% ~ 130%
Total connection rate Hydrofree + DX	2-pipe* VRF	-	50% ~ 130%
	3-pipe* VRF	-	RAS-FSXNSE: 50% ~ 150%
		-	RAS-FSXNPE: 50% ~ 200%
Max. number of indoor units with HM installed		-	38
Max. temperature range of water outlet		-	25°C ~ 80°C
Remote control		-	PC-ARFWE (mounted locally)

\* Important: simultaneous operation can never be higher than 100% in heat pump mode. Simultaneous operation in the same mode can never exceed 100% for a heat recovery system.  
 (1 \*) The maximum number of indoor units is the recommended quantity of indoor units for every size of outdoor unit. For more information, please refer to the technical catalog of the outdoor unit.  
 (\* 2) See Section "9.5.2.2 Function of DIP switches and dial switches" for more information on Pin 3 of the DSW8 with a connection rate of > 180%.

**You can have multiple contacts with the PCC-1A connector:** progress report, error report, thermostat control, remote "Start/Stop".

## Controls and compatible accessories (see page 60)

