



Compact Wired Remote Controller UTY-RCRYZ1



Point

Large screen and simple display


- Although the size is compact, the screen is large
- Large letters makes it easy to see
- Operation is simple and easy-to-understand

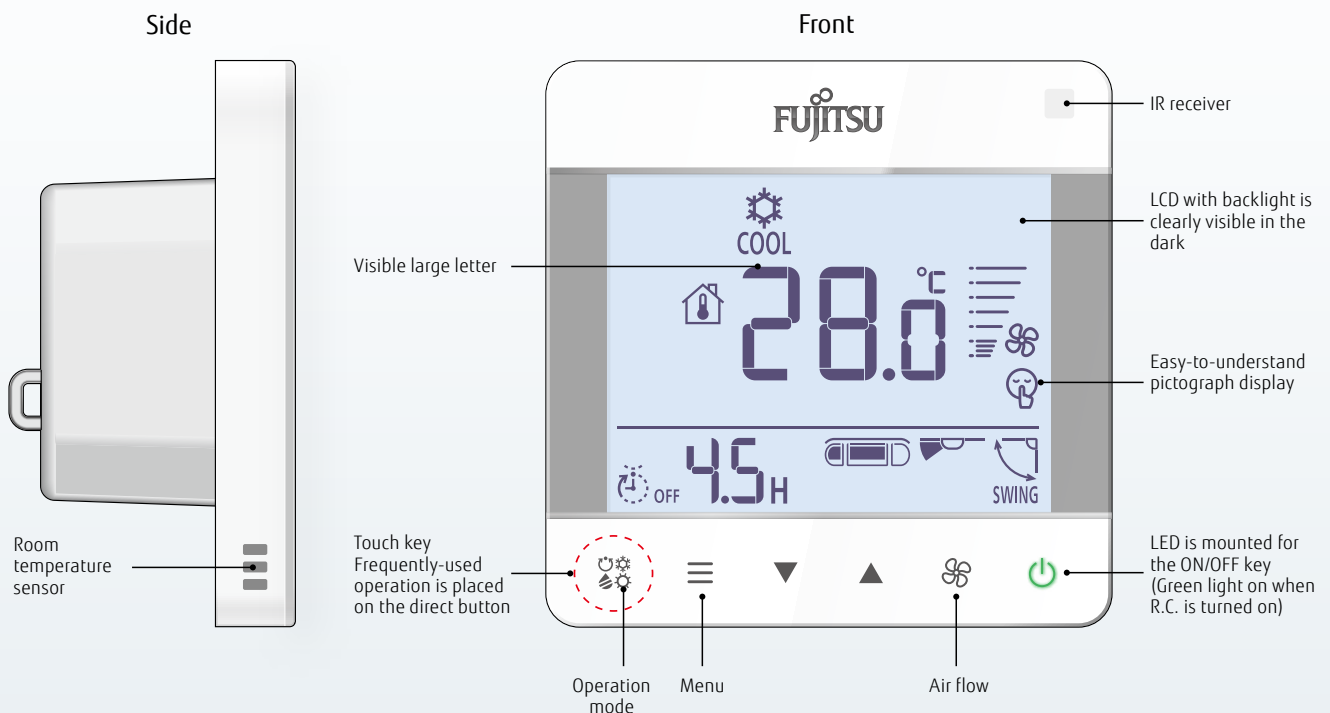

Point

Operation by wireless and wired controller

IR receiver is built in
Can operate indoor unit both by wireless and wired remote controller
(Ex. Operate with wired remote controller when entering the room, operate with wireless remote controller from inside the room)

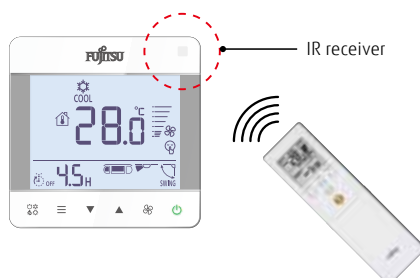

Point

Stylish Design


Simple design to match the stylish interior



Easy Installation

Easy to install


Body of controller is designed to fit in European standard junction box as below

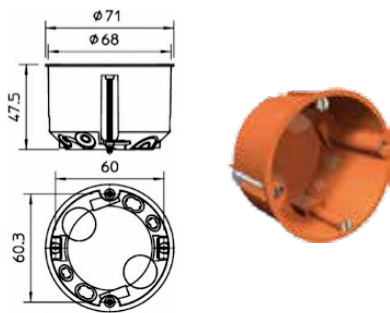

System overview


VRF connection

One indoor unit and one remote controller are connected in one non-polar and 2-wire remote controller system.

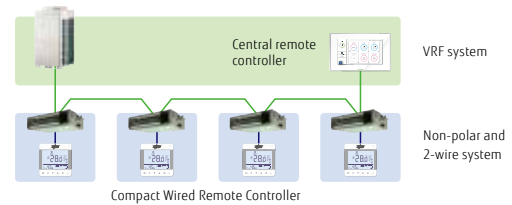

RAC connection

One indoor unit and one remote controller are connected in one non-polar and 2-wire remote controller system.



Specifications

Model name	UTY-RCRYZ1	
Power Supply	DC12V	
Dimensions (H×W×D)	mm	86 × 86 × 44
Weight	g	135

Functions

Max. controllable remote controller groups	1
Max. controllable indoor units	1
Max. controllable groups	—
Air conditioning control function	
On / Off	●
Operation mode setting	●
Fan speed setting	●
Room temp. setting	●
Room temp. set point limitation	—
Test operation	●
Up/down air direction flap setting	●
Right/left air direction flap setting	●
Individual louver control	●
Group setting	—
RC prohibition	—
Anti freeze setting	●
Set temp. auto return	—
Economy mode setting	●
Human sensor control	—

●: Supported ○: Optional function —: Not supported yet

Display

Error	●
Defrosting	●
Current time	—
Day of week	—
R.C. prohibition	●
Address display	●
Room temp	●
Multi language	—
Summer time	—
Name registration	—
Backlight	●
2D floor layout / 3D building display	—
Refrigerant leakage detection function	—


Timer

Schedule timer	Period	—
	On/off, Temp, Mode, Times per day	—
On/off timer		● (OFF only)

Timer

Sleep timer	—
Program timer	—
Auto off timer	—
Day off	—
Min. unit of timer setting (Minutes)	—
Control	
Status monitoring system	—
Electricity charge apportionment	—
Error history	—
Emergency stop	—
Remote management	—
Energy saving management	—
E-mail notification for malfunction	—
Key lock	—
Low noise mode	—

Dimensions

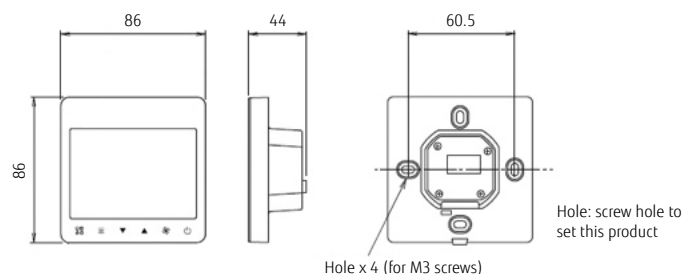

(Unit : mm)

- Specifications and design are subject to change without notice for further improvement.
- "AIRSTAGE" are worldwide trademarks of FUJITSU GENERAL LIMITED and are registered trademarks in Japan and other countries or areas.
- Other company and product names mentioned herein may be registered trademarks, trademarks or trade names of their respective owners.

• Actual products' colors may be different from the colors shown in this printed material.
Distributed by:



ISO 9001
Certified number: 1501702007385M
Fujitsu General Central Air-conditioner(Wuxi) Co., Ltd.

FUJITSU GENERAL LIMITED

3-3-17, Suenaga, Takatsu-ku, Kawasaki 213-8502, Japan

<https://www.fujitsu-general.com/>

Copyright© 2019 Fujitsu General Limited. All rights reserved. 1NFPN01-1909E